


SEE CURRENT M.U., T.C., D. FOR DETAILS

100' (TYP)



W17-1 (TYP)

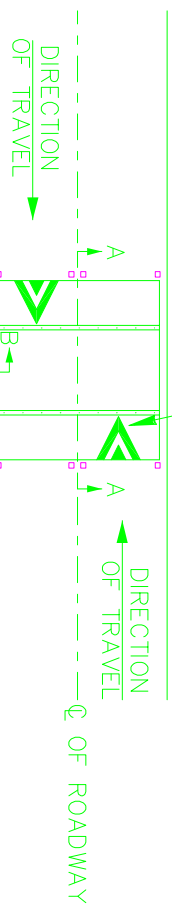


SECTION A-A

SECTION B-B

TYPE 1 SPEED TABLE DETAIL



W17-1 (TYP)

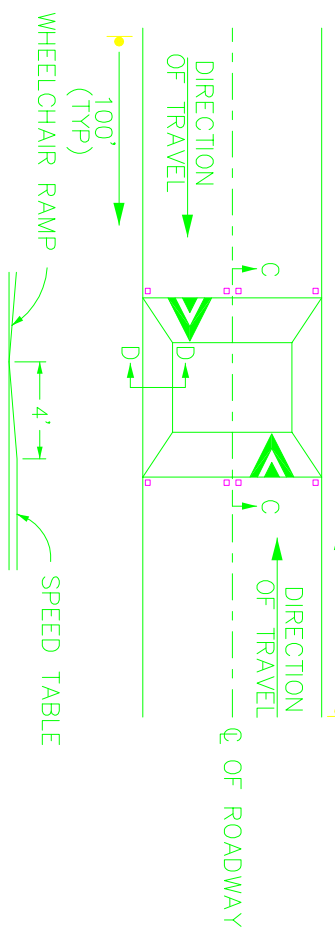

SECTION D-D

TYPE 2 SPEED TABLE DETAIL



SECTION C-C

NOTES:

1. USE TYPE 2 SPEED TABLES IN CONJUNCTION WITH CROSSWALKS, ONLY.
2. SPEED TABLES MAY BE CONSTRUCTED USING ASPHALT OR CONCRETE, PER FULTON COUNTY TRAFFIC ENGINEER.
- A. CONCRETE CONSTRUCTION:
 1. CONSTRUCT SPEED TABLES USING 3000 PSI HIGH/EARLY CONCRETE REINFORCED WITH #3 BARS AT 12" C. TO C. BOTH WAYS, OR 6 X 6 - W2.9 X W2.9 WELDED WIRE FABRIC OR 4 X 4 - W2.0 X W2.0 WELDED WIRE FABRIC. CONCRETE WILL BE COLORED AND TOP STAMPED WITH TEXTURE PER FULTON COUNTY TRAFFIC ENGINEER.
 - B. ASPHALT CONSTRUCTION:
 1. CONSTRUCT SPEED TABLES USING ASPHALTIC CONCRETE 12.5 MM SUPERPAVE IN ACCORDANCE WITH SECTION 402 OF THE GEORGIA DOT STANDARD SPECIFICATIONS, CURRENT EDITION.
 2. APPLY TACK COAT AT A RATE OF 0.04 TO 0.06 GALLONS PER SQUARE YARD IN ACCORDANCE WITH SECTION 413 OF THE GEORGIA DOT STANDARD SPECIFICATIONS, CURRENT EDITION, OR AS DIRECTED BY ENGINEER.
 3. APPLY PAVEMENT MARKINGS USING WHITE THERMOPLASTIC 0.090 INCHES IN THICKNESS IN ACCORDANCE WITH SECTION 653 OF THE GEORGIA DOT STANDARD SPECIFICATIONS, CURRENT EDITION.
 - A. APPLY RAISED PAVEMENT MARKERS, IP 11 (YELLOW/YELLOW) (CENTERLINE) AND TP 13 (CLEAR/RED) (EDGE OF PAVEMENT), USING HEATED BITUMINOUS ADHESIVE IN ACCORDANCE WITH SECTION 868 OF THE GEORGIA DOT SPECIAL SHELF PROVISION SPECIFICATIONS, CURRENT EDITION.
4. SEE SIGN INSTALLATION DETAIL.

FULTON COUNTY STANDARD DETAIL 315
SPEED TABLE

DATE	REVISIONS	DATE	REVISIONS
6-08	CS		

DGS/DRN/CHKD: KAH
APPROVED: LJM
DATE: 4-19-05



FULTON COUNTY PUBLIC WORKS
141 PRYOR ST. ATLANTA, GA. 30303
404-612-7400 FAX: 404-730-6325

DRAWING NO. 315