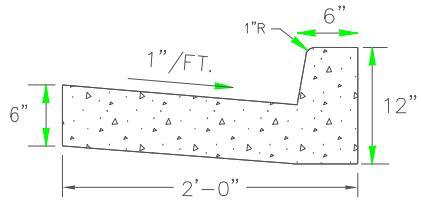

TYPE 1 CONCRETE CURB & GUTTER

INDUSTRIAL ROAD

N.T.S.

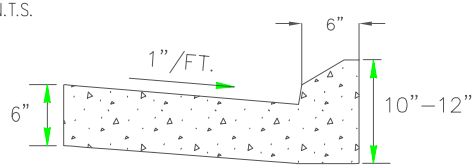

TYPE 2 CONCRETE CURB & GUTTER

MAJOR & MINOR RESIDENTIAL S.D STREETS ONLY

N.T.S.

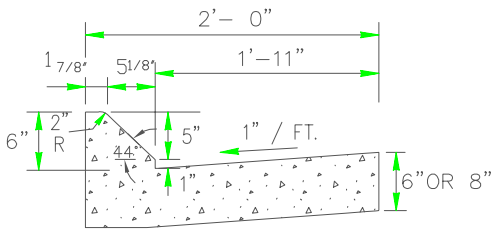

TYPE 3 MOUNTABLE CURB & GUTTER

N.T.S.

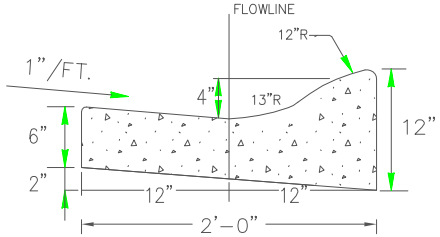

TYPE 4 CONCRETE ROLLED CURB & GUTTER

N.T.S.

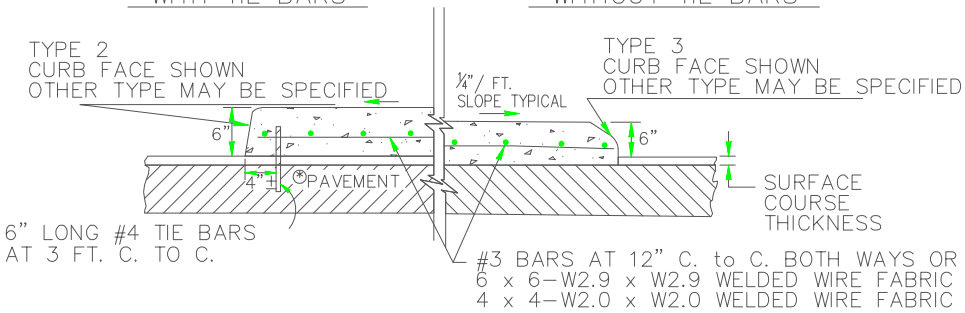

NOTE: IF CONCRETE MEDIAN INTERCEPTS PEDESTRIAN CROSSWALKS, WHEELCHAIR RAMPS (DWG 312) WILL BE REQUIRED.

* P. C. PAVEMENT

TIE BARS WILL BE PLACED AFTER FINISHING & BEFORE INITIAL SET HAS TAKE PLACE.

* ASPHALT PAVEMENT

TIE BARS MAY BE DRIVEN IN OR DRILLED & GROUTED.

CONCRETE MEDIANS (ISLAND)

N.T.S.

DETAILS OF RECESSED CURB

TYPICAL USE: AT DRIVEWAYS OR CURB CUT RAMPS

N.T.S.

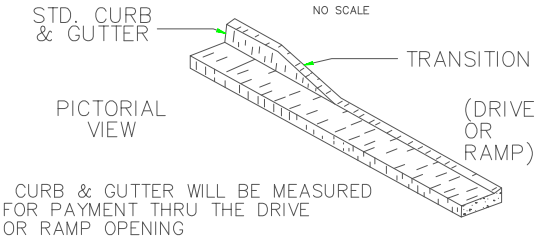

NOTE: CURB & GUTTER WILL BE MEASURED FOR PAYMENT THRU THE DRIVE OR RAMP OPENING



SECTIONAL VIEW

FULTON COUNTY STANDARD DETAIL 307 CURB & GUTTER DETAILS		DATE	REVISIONS	DATE	REVISIONS	DGS/DRN/CHKD: KAH APPROVED: LJM DATE: 4-19-05	FULTON COUNTY PUBLIC WORKS 141 PRYOR ST. ATLANTA, GA. 30303 404-612-7400 FAX: 404-730-6325	DRAWING NO. 307
		6-08	JJM				