



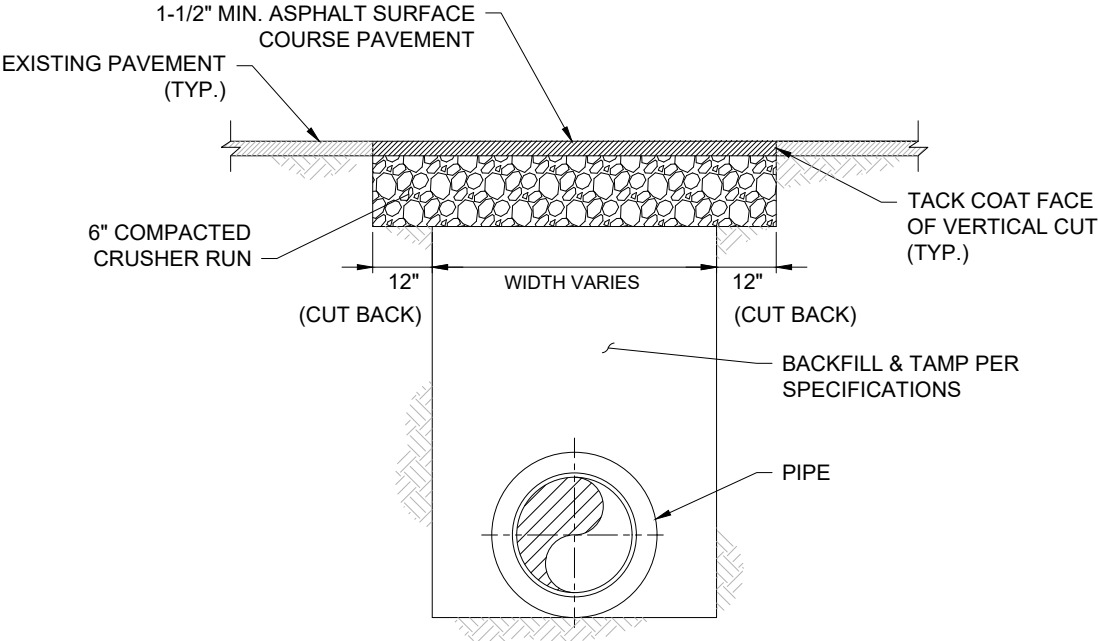


TYPE "A" CUT REPAIR DETAIL
T&G OR ASPHALT RDS
(DRIVEWAYS, A-30)

- NOTES:
- 1. ALL MATERIALS AND METHODS OF INSTALLATION SHALL COMPLY WITH LATEST EDITION OF GDOT'S, "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
 - 2. FOR TYPE "C", THE CONTRACTOR SHALL COVER THE POURED CONCRETE WITH STEEL PLATES A MINIMUM OF 24 HOURS TO ALLOW ADEQUATE SET-UP.
 - 3. CONTRACTOR'S TRAFFIC CONTROL PLAN MUST BE APPROVED BY THE AUTHORITY HAVING JURISDICTION BEFORE WORK BEGINS.
 - 4. FINAL APPROVAL OF CONTRACTOR'S PAVEMENT CUT REPAIRS RESIDES WITH THE AUTHORITY HAVING JURISDICTION. CONTRACTOR SHALL MEET ALL REQUIREMENTS OF SAID AUTHORITY.
 - 5. FOR TRENCH AND CUT WIDTHS, SEE DWG. NO. 103.
 - 6. PROVIDE #4 REBARS @ 12-INCH O.C. WHEN PIPE SIZE IS GREATER THAN 16-INCH OR TRENCH WIDTH IS GREATER THAN 3 FEET.

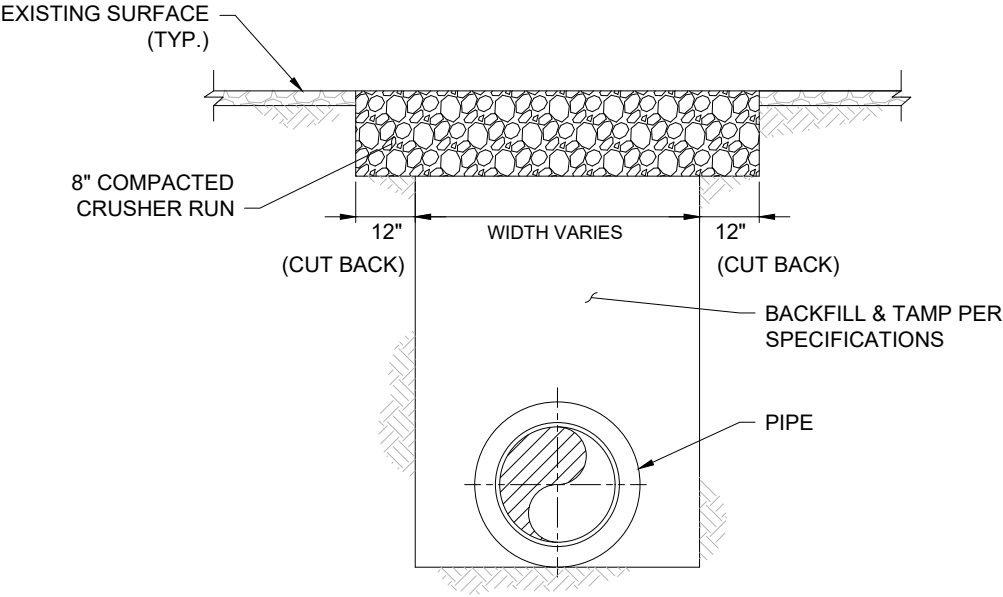

TYPE "B" CUT REPAIR DETAIL
DIRT OR GRAVEL RDS
(DRIVEWAYS, A-30)

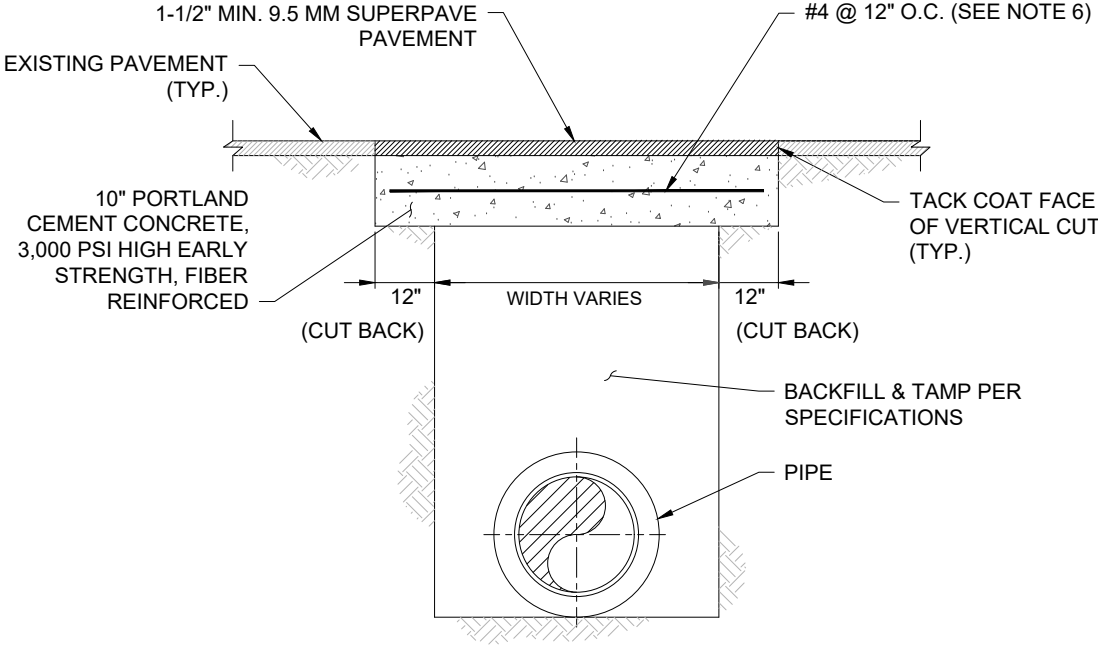

TYPE "C" CUT REPAIR DETAIL
GEORGIA DOT AND FULTON CO.

FULTON COUNTY STANDARD DETAIL 109 PAVEMENT CUT REPAIRS/STANDARD UTILITY CUT TYPE A, B & C		DATE	REVISIONS	DATE	REVISIONS	DGS/DRN/CHKD: MB/EB/ML APPROVED: TM DATE: 02-18-2026		FULTON COUNTY PUBLIC WORKS 141 PRYOR ST. ATLANTA, GA. 30303 404-612-7400 FAX: 404-224-0498	DRAWING NO. 109