
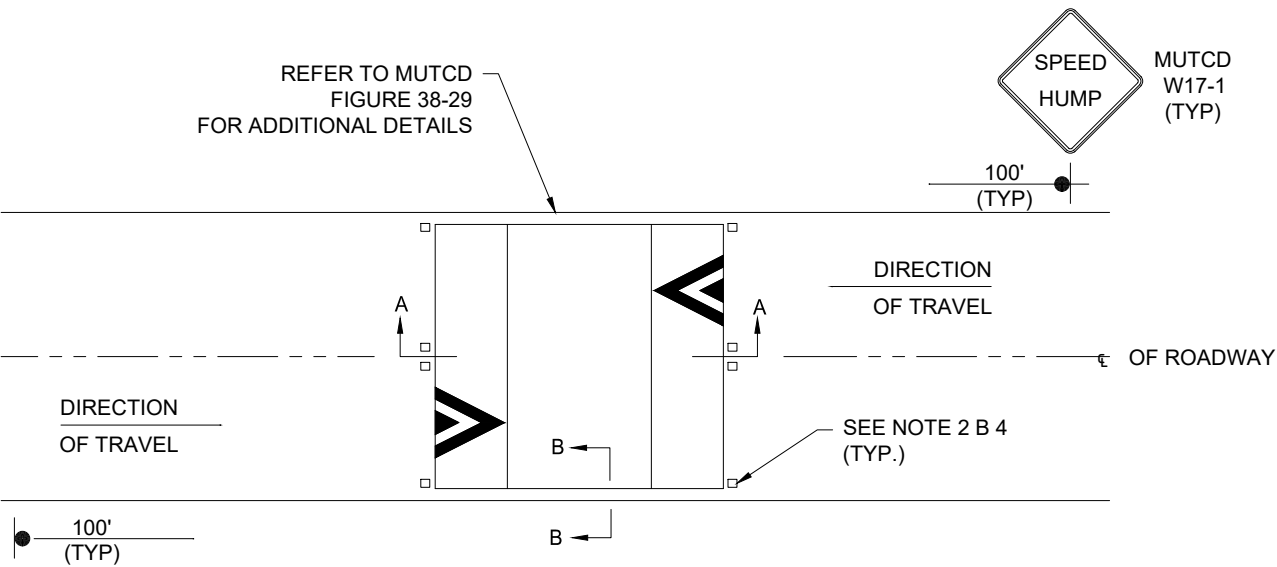



SECTION B-B
TYPE 1 SPEED TABLE DETAIL
NTS

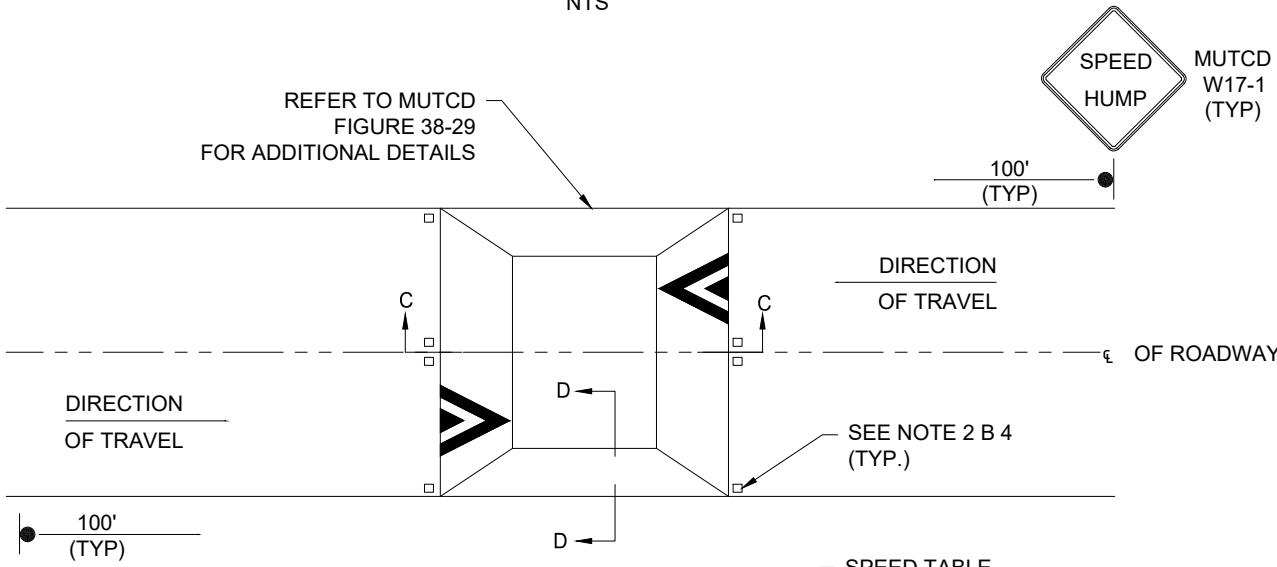

SECTION D-D
TYPE 2 SPEED TABLE DETAIL
NTS

NOTES:

1. USE TYPE 2 SPEED TABLES IN CONJUNCTION WITH CROSSWALKS, ONLY.
2. SPEED TABLES MAY BE CONSTRUCTED USING ASPHALT OR CONCRETE, PER FULTON COUNTY TRAFFIC ENGINEER.
 - A. CONCRETE CONSTRUCTION:
 - 1) CONSTRUCT SPEED TABLES USING 3000 PSI HIGH/EARLY CONCRETE REINFORCED WITH #3 BARS AT 12" C. TO C. BOTH WAYS, OR 6 X 6 -W2.9 X W2.9 WELDED WIRE FABRIC OR 4 X 4 - W2.0 X W2.0 WELDED WIRE FABRIC.
 - 2) CONCRETE WILL BE COLORED AND TOP STAMPED WITH TEXTURE PER FULTON COUNTY TRAFFIC ENGINEER.
 - B. ASPHALT CONSTRUCTION:
 - 1) CONSTRUCT SPEED TABLES USING ASPHALTIC CONCRETE 12.5 MM SUPERPAVE IN ACCORDANCE WITH SECTION 402 OF THE GEORGIA DOT STANDARD SPECIFICATIONS, CURRENT EDITION.
 - 2) APPLY TACK COAT AT A RATE OF 0.04 TO 0.06 GALLONS PER SQUARE YARD IN ACCORDANCE WITH SECTION 413 OF THE GDOT STANDARD SPECIFICATIONS, CURRENT EDITION, OR AS DIRECTED BY ENGINEER.
 - 3) APPLY PAVEMENT MARKINGS USING WHITE THERMOPLASTIC 0.090 INCHES IN THICKNESS IN ACCORDANCE WITH SECTION 653 OF THE GDOT STANDARD SPECIFICATIONS, CURRENT EDITION.
 - 4) APPLY RAISED PAVEMENT MARKERS PER GDOT CONSTRUCTION DETAIL T-15C, TYPE 11 (YELLOW/YELLOW) (CENTERLINE) AND TYPE 13 (CLEAR/RED) (EDGE OF PAVEMENT), USING HEATED BITUMINOUS ADHESIVE IN ACCORDANCE WITH SECTION 868 OF THE GDOT SPECIAL SHELF PROVISION SPECIFICATIONS, CURRENT EDITION.
3. SEE SIGN INSTALLATION DETAIL DWG 322 A/B/C.

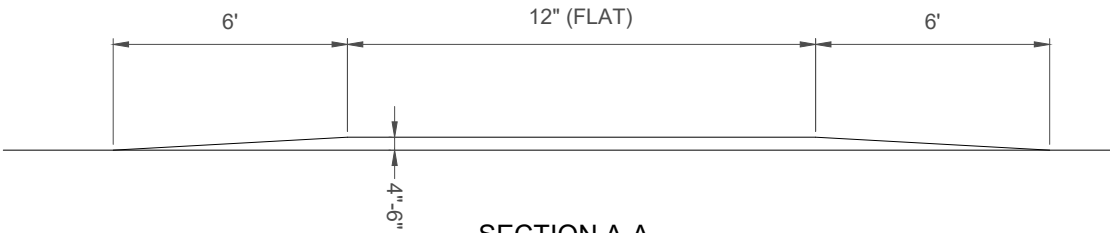

SECTION A-A
SECTION C-C

FULTON COUNTY STANDARD DETAIL 315

SPEED TABLE

DATE	REVISIONS	DATE	REVISIONS

DGS/DRN/CHKD: MB/EB/ML
APPROVED: TM
DATE: 02-18-2026



FULTON COUNTY PUBLIC WORKS
141 PRYOR ST. ATLANTA, GA. 30303
404-612-7400 FAX: 404-224-0498

DRAWING NO.

315