
FULTON COUNTY TREE PRESERVATION ORDINANCE AND ADMINISTRATIVE GUIDELINES

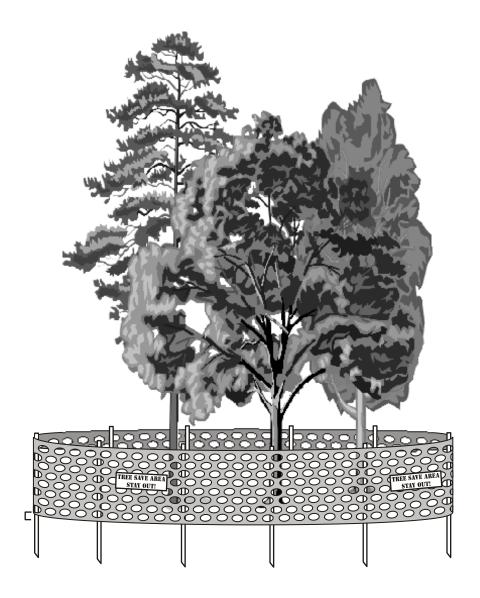

ADOPTED BY THE BOARD OF COMMISSIONERS: DECEMBER 1, 1999

EFFECTIVE DATE: JANUARY 1, 2000

REVISED: SEPTEMBER 2014 BY THE DEPARTMENT OF PLANNING AND COMMUNTY SERVICES

TREE PRESERVATION ORDINANCE AND ADMINISTRATIVE GUIDELINES

FOR
AGRICULTURE LAND USE DISTRICTS
SINGLE FAMILY RESIDENTIAL LAND USE DISTRICTS
COMMERCIAL & ALL OTHER NON-SINGLE FAMILY
RESIDENTIAL LAND USE DISTRICTS

UNINCORPORATED FULTON COUNTY, GEORGIA

The 2000 Tree Preservation Ordinance and Administrative Guidelines was revised by the Department of Environment and Community Development/Planning and Community Services Department, Plan Review Division

First Printing, January 1986 Revised January 1992 Revised December 1999 Revised January 2003 Revised September 2014

ACKNOWLEDGEMENTS

Tree Preservation Revision Committee

Owen Winters	Abby Jordan	Deanne Meningall	H. Thomas Williams
Dale Nesbit	George Hart	Hank Wiley	Ray McGee
Becky Wynn	Felton Alexander	Carolyn Kayne	Ken Collier
Jack Richey	Edith Ladipo	Swain Guzzardi	David Gehle
Judy Webb	Lynn Gude	Doug Crawford	Rose McCain
Bill Huff	Lamont Carr	George Berkow	Jody Huneycutt
Ron Comacho	Juanita Gardner	Charlie Roberts	Brad Nestor
Gary Davis	Mary Darian	Gilbert Thompson	

Fulton County Citizens Commission on the Environment (FCCCE)

Tochie Blad	Linda Jordan	Clayton Shepard
Linda Brooks	Robert Peoples	Brian Tulley
Na'Taki Osborne	John Sherrill	·

Greater Atlanta Home Builders

Bettie Sleeth Roger Festa Michael Kilgallon

<u>Fulton County Developers Advisory Committee</u>

John Schiavone Woody Snell

Scofield Timber Company, Inc.

Jay C. Bear

Fulton County Planning Commission

E. F. Morey Roger Rupnow

Georgia Forestry Commission

Joe Burgess

United States Department of Agriculture

Ed Macie

TABLE OF CONTENTS

TABL	E OF CO	NTENT	S	i
APPE	ENDICES			iv
SECT	TION I.	FUL	TON COUNTY TREE PRESERVATION ORDINANCE	
l.	Purpos	se		1
II.			Applicability	
III.	Definiti	ons		2
IV.	Permit	Proced	ures	7
V.	Remov	al of Tre	ees	7
VI.	Violatio	ons		8
VII.	Enforce	ement		8
VIII.	Inspec	tions		8
IX.	Notice	of Viola	tion	9
Χ.	Stop W	ork Ord	lers	9
XI.	Modific	ation, R	levocation, Suspension, Voidance of Permit	10
XII.				
XIII.	Fines a	and Pen	alties	10
XIV.	Appeal	s		10
XV.	Effectiv	e Date		11
XVI.	Validity	<i>/</i>		11
SECT	TION II.	ADN	MINISTRATIVE GUIDELINES FOR AGRICULTURE DISTRICTS	
A.	PROC	EDURE	S	12
	1.	Land	d Disturbance Permits	12
	2.	Rez	oning and Special Use Permits	13
	3.		per Harvesting Permit Requirements	
	4.	Resi	dential Erosion & Sedimentation and Tree Protection Agreement Form	16
B.	TREE	PROTE	CTION	16
	1.	Stan	dards for Specimen And Heritage Trees And Stands of Trees	16
	2.	Meth	nods of Tree Protection	17
		a.	Planning Consideration	17
		b.	Protective Barriers	17

C.	REVE(GETATION	18
	1.	Tree Replacement	18
	2.	Procedures for Calculating Required Tree Replacement Density Factors	21
		a. Conversion Tables	22
	3.	Standards for Selecting Quality Replacement Stock	23
	4.	Planting Minimum Requirement Table	24
	5.	Transplanting Standards	27
D.	LANDS	SCAPE STRIP AND BUFFER STANDARDS	29
	1.	Landscape Strips	29
	2.	Planting Within Right-of-way	31
	3.	Buffers	32
SEC	TION III.	ADMINISTRATIVE GUIDELINES FOR SINGLE FAMILY DISTRICTS	
A.	PROCI	EDURES	
	1.	Land Disturbance Permits	
	2.	Rezoning and Special Use Permits	
	3.	Timber Harvesting Permit Requirements	
	4.	Residential Erosion & Sedimentation and Tree Protection Agreement Form	37
B.	TREE	PROTECTION	
	1.	Standards For Specimen And Heritage Trees And Stands of Trees	38
	2.	Methods of Tree Protection	38
		a. Planning Consideration	38
		b. Protective Barriers	39
C.	REVE	GETATION	40
	1.	Tree Replacement	
	2.	Procedures for Calculating the Required Tree Replacement Density Factor	43
		a. Conversion Tables	44
	3.	Standards for Selecting Quality Replacement Stock	45
	4.	Planting Minimum Requirement Tables	46
	5.	Transplanting Standards	49
D.	LANDS	SCAPE STRIP AND BUFFER STANDARDS	51
	1.	Landscape Strips	51
	2.	Planting Within Right-of-ways	53
	3.	Buffers	53

SECTION IV. ADMINISTRATIVE GUIDELINES FOR COMMERCIAL AND ALL OTHER NON-RESIDENTIAL DISTRICTS

PROCE	EDURES	56
1.	Land Disturbance Permits	56
2.	Rezoning and Special Use Permits	57
3.	Timber Harvesting Permit Requirements	58
4.	Residential Erosion & Sedimentation and Tree Protection Agreement Form	60
TREE F	PROTECTION	60
1.	Standards For Specimen And Heritage Trees And Stands of Trees	60
2.	Methods of Tree Protection	61
	a. Planning Consideration	61
	b. Protective Barriers	61
REVEG	SETATION	62
1.	Tree Replacement	62
2.	Procedures for Calculating the Required Tree Replacement Density Factor	65
	a. Conversion Tables	66
3.	Standards for Selecting Quality Replacement Stock	67
4.	Planting Minimum Requirement Tables	68
5.	Transplanting Standards	71
LANDS	CAPE STRIP AND BUFFER STANDARDS	73
1.	Landscape Strips	73
2.	Planting Within Right-of-ways	75
3.	Buffers	
	1. 2. 3. 4. TREE F 1. 2. REVEG 1. 2. 3. 4. 5. LANDS 1. 2.	2. Rezoning and Special Use Permits 3. Timber Harvesting Permit Requirements 4. Residential Erosion & Sedimentation and Tree Protection Agreement Form TREE PROTECTION 1. Standards For Specimen And Heritage Trees And Stands of Trees 2. Methods of Tree Protection 2. Methods of Tree Protection 3. Planning Consideration 4. Protective Barriers REVEGETATION 5. Tree Replacement 7. Procedures for Calculating the Required Tree Replacement Density Factor 7. Conversion Tables 7. Standards for Selecting Quality Replacement Stock 7. Planting Minimum Requirement Tables 7. Transplanting Standards 7. Landscape Strips 7. Planting Within Right-of-ways

APPENDICES

APPENDIX A.	Typical Root Protection Zone	78
APPENDIX B.	Tunneling	79
APPENDIX C.	Grade Changes	80
APPENDIX D.	Checklist For Landscape & Tree Protection Plans	81
APPENDIX E.	Tree Species Selection List	84
APPENDIX F.	Sample Tree Density Calculation	85
APPENDIX G.	Multi-Trunked Tree Calculations	86
APPENDIX H.	Tree and Site Related Disturbances	87
APPENDIX I.	Residential Erosion & Sedimentation Control and Tree Protection Agreement	89
APPENDIX J.	Acceptable Evergreen Plant Material For Undisturbed Buffers	90
APPENDIX K.	Recommended Shade Trees for Parking Lots	91
APPENDIX L.	Protective Tree Fencing Detail	92
APPENDIX M.	Sample Tree Protection Plan	93

SECTION I.

Fulton County Tree Preservation Ordinance

Section I. Fulton County Tree Preservation Ordinance

I. Purpose

- A. The purpose of this ordinance is to cultivate and encourage a high level of tree preservation, to promote the general provisions within this ordinance, and to develop detailed provisions within the administrative guidelines in order to implement the regulations set forth to preserve, maintain, and replant trees within unincorporated Fulton County, Georgia. The intent of the Ordinance and Administrative Guidelines is to provide standards for the preservation of trees as part of the land development, building construction and timber harvest processes. It is not the intent of this ordinance to regulate individual properties where activities do not require a land disturbance, building construction or timber harvest permit.
- B. Benefits to Fulton County citizens derived from tree protection and replanting include:
 - 1. Improved control of soil erosion.
 - 2. Moderation of storm water runoff and improved water quality.
 - 3. Interception of airborne particulate matter and the reduction of some air pollutants.
 - 4. Enhanced habitat for desirable wildlife.
 - 5. Reduction of noise and glare.
 - 6. Climate moderation.
 - 7. Aesthetics and scenic amenity.
 - 8. Increased property value.

II. Authority and Applicability

- A. Standards for tree preservation established hereunder supersede and replace those contained in the former Fulton County Tree Preservation Ordinance, adopted and approved on January 8, 1986, codified as § § 26-396 through 26-403, Fulton County Code of Laws (1997).
- B. Terms and provisions of the Tree Preservation Ordinance and the Administrative Standards established herein, shall apply to all activity which requires the issuance of a land disturbance permit on any real property within unincorporated Fulton County. No land disturbance permit shall be issued by the Department of Planning and Community Services (hereinafter the "Department", (or any successor to that Department) without it being determined that the proposed development is in conformance with the provisions of these regulations.
- C. The terms and provisions of these regulations shall also apply to construction of new single family detached and duplex dwellings, including additions, renovations and/or alterations to existing single family detached and duplex dwellings.
- D. The terms and provisions of these regulations shall also apply to timber harvesting activities.

III. Definitions

All words in these standards have their customary dictionary definitions except as specifically defined herein. The words "shall" and "must" are mandatory, and the words "may" and "should" are permissive.

- 1. <u>Agent(s), designated or authorized</u>: an individual or entity authorized to administer and enforce the standards set forth in the Fulton County Tree Preservation Ordinance and Administrative Guidelines.
- 2. <u>Buildable Area</u>: The portion of a parcel of land where a building may be located and which shall contain enough square footage to meet the minimum required by the zoning district. That portion which is not located in the minimum setbacks, utility corridors, driveways, slopes to build streets, tree save areas, landscape strips, specimen tree areas, state water buffer, tributary buffers, zoning buffers, wetlands, storm water and sanitary sewer easements.

3. **Buffer**:

- a. **State Waters Buffer**: An area along the course of any State waters to be maintained in an undisturbed and natural condition.
- b. **Tributary Buffer**: A protection area adjoining the tributaries of the Chattahoochee River. Tributary buffer specifications are contained in Part D. of each prospective land use section of the Fulton County Tree Preservation Ordinance and Administrative Guidelines.
- c. Zoning Buffer: A natural undisturbed portion of a lot, except for approved access and utility crossings, which is set aside to achieve a visual barrier between the use on the lot and adjacent lots and/or uses. Buffer is achieved with natural vegetation and must be replanted subject to the approval of the Director of the Department or his/her designated agent(s) when sparsely vegetated. Cleaning of undergrowth from a buffer is prohibited except when accomplished under the supervision of the Director of the Department or his/her designated agent(s).
- 4. <u>Caliper</u>: The standard for trunk measurements of nursery stocks. Caliper of the trunk shall be taken 6 inches above the ground for up to and including 4 inch caliper size and 12 inches above the ground for larger sizes.
- 5. <u>Cambium</u>: Tissue within the woody portion of trees and shrubs which gives rise to the woody water and nutrient conducting system and the energy substrate transport system in trees. Cambium growth activity results in a tree's radial development, i.e., increase in diameter.
- 6. **Cambial Dieback**: The irreparable radial or vertical interruption of a tree's cambium, usually caused by mechanical damage, such as "skinning bark" or from excessive heat.

- 7. <u>Clear Cutting</u>: The removal of all trees from a property, whether by cutting or other means, excluding stream buffer requirements.
- 8. **Coniferous**: Belonging to the group of cone-bearing evergreen trees or shrubs.
- 9. <u>County Arborist</u>: The agent(s) of Fulton County assigned to the Department having the primary responsibilities of administration and enforcement of the Tree Preservation Ordinance.
- 10. <u>Critical Root Zone</u>: The area of tree roots within the crown dripline. This zone is generally defined as a circle with a radius extending from a tree's trunk to a point no less than the furthest crown dripline. Disturbances within this zone will directly affect a tree's chance for survival.
- 11. <u>Crown Drip Line</u>: A vertical line extending down to the ground from the end of a tree's longest branches.
- 12. **Deciduous**: Not persistent; the shedding of leaves annually.
- 13. <u>D.B.H.</u>: Diameter-at-breast-height is a standard measure of tree size, (for trees existing on site) and is a tree trunk diameter measured in inches at a height of 4 ½ feet above the ground. If a tree splits into multiple trunks below 4 ½ feet, refer to chart in Appendix I.
- 14. **Density Factor for the Site (DFS)**: A unit of measure used to prescribe and calculate required tree coverage on a site. Unit measurements are based upon tree size.
 - a.) Site acreage multiplied by (15) for Agricultural Districts = DFS.
 - b.) Site acreage multiplied by (20) for Single Family Residential Districts = DFS.
 - c.) Site acreage multiplied by (30) for Commercial Districts and all other Non-Single Family Districts = (DFS).
- 15. <u>Erosion and Sedimentation Control Ordinance</u>: The ordinance adopted by the County that regulates soil erosion and its transportation to the County's lakes, rivers, and streams (latest revision).
- 16. <u>Improvement Setback:</u> An area adjacent to a zoning buffer in which no improvements and/ or structures shall be constructed. No development activity such as tree removal, stump removal or grinding, land disturbance or grading is permitted without the approval of the Director of the Department.
- 17. Land Disturbing Activity: Any activity which may result in soil erosion from water or wind and movement of sediments into state water or onto lands within the state, including, but not limited to, clearing, dredging, grading, excavating, transporting, and filling of land but not including agricultural practices as described in Fulton County Soil Erosion and Sedimentation Control Ordinance of 1996, Fulton County Code of Laws § 26-38(5) (1997), as amended.

- 18. <u>Land Disturbance Permit</u>: A permit issued by the Department that authorizes the commencement of alteration or development of a given tract of land or the commencement of any land disturbing activity.
- 19. <u>Landscape Plan</u>: A plan that identifies areas of tree preservation and methods of tree protection within the protected zone, as well as all areas of replanting. Within replanting areas, the common and botanical names of the proposed species, the number of plants of each species, the size of all plant materials, the proposed location of all plant materials, and any unique features of the plant materials shall be indicated.
- 20. <u>Landscape Strip</u>: An area required by this ordinance, by the Fulton County Zoning Resolution or any condition of zoning, use permit or variance approval, which is reserved for the installation and/or maintenance of plant materials.
- 21. <u>Minimum Setback</u>: The minimum yards as specified in the regulations related to the zoning districts or use permit categories. A minimum required space between a property line and a structure. An area identified by a building line.
- 22. **Protected Zone**: Includes but is not limited to the following:
 - 1.) Critical root zone plus an additional 3 feet; all areas of a parcel required to remain in open space; all areas required as landscape strips and/or buffers (including zoning buffers, state water buffers and tributary buffers); tree save areas according to provisions of the Fulton County Zoning Resolution, conditions of zoning, use permit or variance approval, and/or the Tree Preservation Ordinance and Administrative Guidelines.
- 23. **Revegetation**: The replacement of trees and landscape plant materials to satisfy the minimum tree density and landscape requirements, as determined by the Fulton County Zoning Resolution, condition of zoning, use permit or variance approval, or the Tree Preservation Ordinance and Administrative Guidelines.

24. Roots:

- a. Feeder Roots: A complex system of small annual roots growing outward and predominantly upward from the system of "transport roots". These roots branch four or more times to form fans or mats of thousands of fine, short, non-woody tips. Many of these small roots and their multiple tips are 0.2 to 1 mm or less in diameter and less than 1 to 2 mm long. These roots constitute the major fraction of a tree's root system surface area and are the primary sites of absorption of water and nutrients.
- **Major Woody Roots**: First order tree roots originating at the "root collar" and growing horizontally in the soil to a distance of between 3 and 15 feet from the tree's trunk. These roots branch and decrease in diameter to give rise to "rope roots". The primary functions of major woody roots include anchorage, structural support, the storage of food reserves, and the transport of minerals and nutrients.
- **c. Rope Roots**: An extensive network of woody second order roots arising from major woody roots, occurring within the surface 12 to 18 inches of local soils, and with an

- average size ranging from .25 to 1 inch in diameter. The primary function of rope roots is the transport of water and nutrients and the storage of food reserves.
- **d. Transport Roots**: The system or framework of tree roots comprised of major woody roots and rope roots.
- 25. **Root Collar**: The point of attachment of major woody roots to the tree trunk, usually at or near the groundline and associated with a marked swelling of the tree trunk.
- 26. Root Respiration: An active process occurring throughout the feeder root system of trees and involving the consumption of oxygen and sugars with the release of energy and carbon-dioxide. Root respiration facilitates the uptake and transport of minerals and nutrients essential for tree survival.
- 27. **Setback**: A space between a property line and the line to which a building or specified structure may be constructed.
- 28. <u>Soil Compaction</u>: A change in soil physical properties which includes an increase in soilweight per unit volume and a decrease in soil pore space. Soil compaction is caused by repeated vibrations, frequent traffic and weight. As related to tree roots, compacted soil can cause physical root damage, a decrease in soil oxygen levels with an increase in toxic gasses, and can be impervious to new root development.
- 29. <u>State Waters</u>: Any and all rivers, streams, creeks, branches, lakes, reservoirs, ponds, drainage systems, springs, wells, and other bodies of surface or subsurface water, natural or artificial, lying within or forming a part of the boundaries of the State which are not entirely confined and retained completely upon the property of a single individual, partnership, or corporation.
- 30. **Thinning**: Selective cutting or removal of timber. The basal unit of (30) units per acre for Commercial Districts and all other non single family districts; (20) units per acre for Single Family Residential Districts; (15) units per acre for Agricultural Districts shall be maintained after selective cutting, or removal of timber has occurred.
- 31. <u>Timber Harvesting</u>: The felling of timber products (pulp wood, etc). The term "timber harvesting" may include both clear cutting and thinning of timber.

32. **Tree**:

- a. Tree: Any self supporting woody perennial plant which has a trunk diameter of 2 inches or more measured at a point 6 inches above the ground level and which normally obtains a height of at least 10 feet at maturity, usually with one main stem or trunk and many branches.
- **b. Heritage Tree**: A tree which is designated upon approval by the Director of the Department or authorized agent(s) to be of notable historical value or interest because of its age, size, or historical association.

- **c. Specimen Tree**: Any tree which has been determined by the County Arborist to be of high value because of its type, size, age, or other professional criteria, and has been so designated according to administrative standards established by the Department.
- d. Stand of Specimen Trees: A contiguous grouping of trees which has been determined to be of value by the Director of the Department or authorized designee(s).
 (a.) A relatively mature even aged stand.
 (b.) A stand with purity of species composition or of a rare or unusual nature.
 (c.) A stand of historical significance.
 (d.) A stand with exceptional aesthetic quality.
- 33. <u>Tree Bank</u>: A site such as a school or public park, where the owner/developer shall donate and plant the required trees when it is not feasible to plant the required trees within their site's project area.
- 34. <u>Tree Preservation Ordinance</u>: This Ordinance, approved and adopted by the Fulton County Board of Commissioners to provide standards for the protection, preservation and replacement of trees regulated and enforced by the County Arborist in conjunction with the Department or designated agent(s) through development and construction permits and processes.
- 35. <u>Tree Save Area</u>: All areas designated for the purpose of meeting tree density requirements, saving specimen trees, and/or preserving natural buffers.
- 36. <u>Tributary</u>: Any perennial stream (or portion thereof) within the affected area that is portrayed as a solid blue line on the United States Geological Survey 7.5 Quadrangle Maps, 1968 edition, or other perennial streams as identified by Fulton County.
- 37. **Wetlands**: Those areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bog, and similar areas.
- 38. **Zoning Regulations**: The Zoning Resolution of Fulton County as amended or such regulations subsequently adopted by the Board of Commissioners inclusive of conditions of zoning, use permit or variance approval established pursuant thereto.
- 39. <u>All other terms</u>: All other words or phrases as appropriate to the context of their uses shall be interpreted as defined in the Zoning Regulations.

IV. Permit Procedures

- A. All applications for a Land Disturbance Permit shall provide a landscape plan and other documentation as required and as applicable for all areas of the tract of land within a protected zone. All applications and required supplemental information shall be submitted to the Director of the Department.
- B. All landscape plans and related documentation shall be reviewed by the County Arborist for conformance to the provisions of these regulations and either approved, returned for revisions,

- or denied within 30 days of receipt. If denied or returned for revisions the reasons for denial or revision shall be annotated on the landscape plan or stated in writing.
- C. Issuance of a valid Land Disturbance Permit shall constitute an approval of the required landscape plan and shall indicate conformance to the provisions of these regulations.
- D. For issuance of any residential building permit, applicant must sign and agree to abide by the Residential Erosion & Sedimentation Control Tree Protection Agreement, (see Appendix H. to the Administrative Guidelines). This shall also apply to parcels upon which a land disturbance permit has been previously issued with a tree protection plan approved by the County Arborist. The Director of the Department, or his/her designee, is authorized to execute such Agreements on behalf of Fulton County.

V. Removal of Tree(s)

- A. If the owner/developer proposes to remove any tree(s) in the protected zone, then the owner/developer must document a hardship such as but not limited to economic or zoning restrictions and submit it as part of the application for a Land Disturbance Permit. The application shall be subject to the approval of the Director of the Department or designated agent before any trees are to be removed from the site. Nothing in these regulations shall be construed to allow the removal of vegetation in a natural, undisturbed buffer required by the Zoning Regulations.
- B. When no trees are present in the protected zone or when disturbance of any portion of the protected zone is approved, it shall be the responsibility of the owner/developer to revegetate said areas (in which improvements are not constructed) with trees or other plant materials subject to zoning regulations or, in lieu thereof, administrative standards established by the Department.
- C. Not withstanding any of the other requirements of these regulations, it shall be unlawful to remove a specimen tree without the express written permission of the County Arborist or authorized agent(s). Administrative standards have been established by the Director of the Department for the identification, preservation and protection of specimen trees.

VI. Violations

Citations for any of the following violations, by authorized Fulton County enforcement agent(s) may constitute issuance of an immediate stop work order.

- A. Land disturbance and/or tree removal within state water, tributary, or zoning buffer(s).
- B. Land disturbance and/or tree removal within tree save area(s).
- C. Illegal removal or disturbance of specimen tree, heritage tree or stand of trees.
- D. Improper installation of tree fencing.
- E. Other violations of any provision(s) of this Ordinance or the Administrative Guidelines established pursuant thereto, including Appendices.

VII. Enforcement

- A. It shall be the duty of the Department and designated agent(s) to enforce this Ordinance and Administrative Guidelines. The Department's designated agent(s) shall have the authority to modify, revoke, suspend, or void any Land Disturbance Permit and shall have the authority to suspend all work on a site or any portion thereof.
- B. The Department and its designated agent(s) are the issuing authority and shall have the power to withhold all permits, including, but not limited to, final certificates of occupancy, building permits and all permits on the subject site until it is determined by the issuing authority that the site complies with this ordinance and the provisions of the formal plan approved by the County.

VIII. Inspections

- A. The Department is the issuing authority and may cause inspection of compliance to be made periodically by its designated agent(s) during the course of the project and shall make a final inspection following the completion of the work. Applicants shall cooperate with the issuing authority in conducting such inspections.
- B. The Department shall have the power to conduct such investigations as it may reasonably deem necessary to carry out its duties as prescribed in this Ordinance and Administrative Guidelines, including but not limited to the power to enter at reasonable times upon any property, public or private, for the purpose of investigating and inspecting the sites of any land disturbing or tree removal activities.
- C. The Department is authorized to design and implement an inspection program involving private inspectors acceptable to the Department.
- D. No person shall refuse entry or access to any authorized representative or agent who requests entry for the purpose of inspection and who presents appropriate identification, nor shall any person obstruct, hamper or interfere with any such representative while in the process of carrying out his official duties.

IX. Notice of Violation

- A. If, through inspection, it is determined that a person, firm, or corporation has 1.) engaged in land disturbing or other activities, which have resulted in the removal of trees; or 2.) failed to comply with the terms and conditions of a validly issued permit, then a written notice of violation shall be served upon the property owner or the agent of record.
- B. Where a person, firm, or corporation has engaged in land disturbing or tree removal activities without having first secured a permit therefore in violation of this Ordinance and Administrative Guidelines, notices under the provisions of this section may be served upon the person in charge or any person representing the person in charge on the site. All construction and land disturbance activity shall be discontinued until the necessary measures to achieve compliance have been fulfilled.
- C. The notice shall set forth the measures necessary to achieve compliance with the permit and shall state the time within which such measures must be completed.

D. If the person, firm, or corporation engaged in land disturbing activity fails to comply within the time specified, he/she shall be subject to citation for violation of this Ordinance and Administrative Guidelines.

X. Stop Work Orders

A. Upon notice from the Department, work on any project that is being done contrary to the provisions of this Ordinance and Administrative Guidelines shall be immediately stopped, until such time that the violation has been remedied to the satisfaction of the Director of the Department. Prior to remediation a plan shall be submitted to and approved by the County Arborist

B. Such Notice:

- 1. shall be in writing.
- 2. shall state the specific violation(s).
- 3. shall be given to the applicant, owner, the authorized agent of either, or the person in charge, or any person representing the person in charge of the activity on the subject property.
- 4. shall state the conditions under which work may be resumed.
- 5. where an emergency exists, no written notice shall be required.
- 6. shall allow only erosion control work to continue while stop work is in effect

XI. Modification, Revocation, Suspension, Voidance of Permit

A land disturbance permit and/or other permit(s) required by this Ordinance and Administrative Guidelines may be modified, revoked, suspended, or voided by the Department upon finding that the holder is in violation of the terms of the permit or any portion of this Ordinance and Administrative Guidelines.

XII. Bonding

Fulton County will evaluate all development projects (excluding timber harvesting) requesting property clear cutting. If upon completion of the site evaluation, the Department deems it appropriate to allow property clear cutting activities, a bond will be required. The bond will be required by Fulton County as a mechanism to cover any potential cost associated with revegetation of the clear-cut property in the event of property abandonment.

The required bond amount will be 125 percent (%) of the total cost for replanting trees to satisfy the density standards for the project site. A tree replacement cost obtained from a plant nursery will be provided to Fulton County with the clear-cut request and the bond amount will be based on the tree replacement cost. Fulton County reserves the right to request additional replacement cost if deemed appropriate. Fulton County will hold the bond until the project activity, including tree replacement to satisfy the site density requirements, is completed. If upon issuing the land disturbance permit, the property is clear cut and there are no construction or development activities conducted within six (6) months, Fulton County will attempt to contact the property owner (via certified mail) for a project update. Should the property owner not respond within thirty (30) days of receipt of the status request, the bond will be used to revegetate the project site.

XIII. Fines and Penalties

- A. Any person, firm, corporation or other entity violating any of the provisions of this Ordinance shall be liable for a fine of up to a maximum \$1000.00 dollars per violation per day. Each calendar day a violation exists shall be considered a separate offense. There are no maximum limitations to the accrual of fines.
- B. Each owner of any property wherein a violation exists shall be jointly and severally responsible for said violations. Each offense will be tried in the Fulton County Magistrate Court ("Environmental Court").

XIV. Appeals

- A. Any person aggrieved or affected by any decision of the County Arborist relating to the application of these regulations may file an appeal within thirty (30) days of the decision with the Director of the Department for relief or reconsideration.
- B. Any person aggrieved or affected by any decision of the Director of the Department of Environment and Community Development relating to the application of these regulations may file an appeal within thirty (30) days of the decision with the Board of Zoning Appeals through the Director.
- C. Appeals shall only be granted for errors of interpretation or where the unique natural features of the site are such that application of these regulations would create an undue hardship to the property owner, and in other instances where an undue hardship is created for the owner of the property.

XV. Effective Date

This Ordinance and Administrative Guidelines shall become effective thirty (30) days after its approval by the Board of Commissioners of Fulton County and shall replace the former Fulton County Tree Preservation Ordinance and Administrative Guidelines, §§26-396 through 25-403, Fulton County Code of Laws (1997). All land disturbance and building construction permit applications submitted prior to the approval date of this ordinance and administrative guidelines and within the thirty (30) day effective date grace period shall not be required to adhere to this Tree Preservation Ordinance and Administrative Guidelines; however, such applications shall be required to comply with the above-referenced Fulton County Tree Preservation Ordinance and Administrative Guidelines which is being replaced by this Ordinance and Administrative Guidelines. All land disturbance and building construction permit applications submitted beyond the thirty (30) day effective date grace period, shall be required to adhere to all requirements of this Tree Preservation Ordinance and Administrative Guidelines.

XVI. Validity

Should any section or provision of this Ordinance, or Administrative Guidelines promulgated hereunder, be declared by a court of competent jurisdiction to be invalid, such decision shall not affect the validity of the Ordinance in whole or any part thereof other than the part so declared invalid.

BOARD OF COMMISSIONERS OF FULTON COUNTY, GEORGIA

APPROVED AS TO FORM:

O.V. Brantley, County Attorney

Justine Boyd, Clerk to Commission

SPONSORED BY

Mike Kenn, Chairman

TTEM # 16/2 RM 12/195, A.M.—REGULAR MEETING

SECTION II. ADMINISTRATIVE GUIDELINES FOR AG-1, AGRICULTURE DISTRICT

This set of guidelines shall apply to land uses within Unincorporated Fulton County's Agriculture District. The Agriculture District is intended to encompass lands devoted to a wide range of uses including single family subdivisions, agricultural and closely related land uses.

A. PROCEDURES

Land Disturbance Permits

a. **Step 1.** Application Forms

Filing application forms and obtaining Ordinance and Administrative Guidelines information.

b. **Step 2.** Tree Protection Plan

A tree protection plan, (TPP) shall be submitted with other permit drawings as part of the land disturbance permit process. This plan may either be a separate drawing or part of the landscape plan and shall include the following information:

- 1. Tree Protection Details, detail drawings of tree protection measures and landscape strips (whichever is applicable or both).
- Protective tree fencing.
- Erosion control fencing.
- Tree protection signs.
- Transplanting specifications.
- Tree wells.
- Staking specifications.
- Other applicable drawings.
- Landscape installation plans, planting details, plant list
- 2. Spatial Limits
- Definition of spatial limits.
- Limits of land disturbance, clearing, grading and trenching.
- Tree protection zones.
- Specimen trees or stands of trees.
- Areas of revegetation and tree density calculations.
- State waters buffers and/or tributary buffers.
- 3. Implementation Schedule
- Procedures and schedules for the implementation, installation and maintenance of tree protection measures.

c. **Step 3.** Review Process

These plans shall be reviewed by the County Arborist or his designated agent(s) for conformance with:

- Applicable Overlay District Regulations
- Fulton County Zoning Resolution
- Applicable Zoning, Use Permit and/or Variance Conditions
- Tree Preservation Ordinance & Administrative Standards
- Any and all Ordinance and Administrative Guidelines dealing with natural resources
- Plans will be either approved, denied or returned for revisions.
- Reasons for denial shall be stated in writing on the tree protection plan.

d. **Step 4.** Tree Protection Measures

All tree protection measures shall be installed by the contractor and then inspected by the County Arborist or designated agent(s) prior to any land disturbance.

e. **Step 5.** Land Disturbance Permit

Issuance of the land disturbance permit is contingent upon approval of the Tree Protection Plan.

f. **Step 6.** Follow-up

The County Arborist will conduct follow-up site inspections for enforcement of the Tree Preservation Ordinance and its Administrative Guidelines.

2. Rezoning and Special Use Permits

a. **Step 1.** Application Forms

Filing application forms and obtaining Ordinance and Administrative Guidelines information.

b. **Step 2.** Case Review

The County Arborist may conduct a preliminary review of all rezoning cases and special use permit applications.

c. **Step 3.** Field Review

A field review of cases may occur under the following conditions:

- 1. For community unit plans and major development cases.
- 2. For cases within the Chattahoochee River Corridor.
- 3. For cases within overlay districts.
- 4. Other cases as determined necessary by the preliminary review.

d. **Step 4.** Conditions

Conditions to rezoning may be required as found necessary by the preliminary review. These conditions may either be general or specific in nature and will reflect the standards or provisions of the Tree Preservation Ordinance and Administrative Guidelines and the Zoning Resolution.

e. **Step 5.** Verification

Compliance with these conditions will be verified by review of a revised site plan prior to the issuance of a land disturbance permit.

3. Timber Harvesting Requirements

Agriculture (AG-1) Land Uses

Pursuant to O.C.G.A. 12-6-24, individuals and companies interested in harvesting timber in unincorporated Fulton County are required to submit a completed Notice of Timber Harvesting Activity to the Fulton County Arborist on a form approved by the Director of the Department. Blank forms are available from the Georgia Forestry Commission or may be obtained from the Department. Prior written notice shall be required of any person or company harvesting timber for each separate tract to be harvested.

Once the Arborist has reviewed the notice and ensured that all the requested information is included, the notice is stamped "*Received*" along with the current day's date. The stamped notice is then returned to the individual overseeing the timbering operation. Timbering can only begin once the stamped notice is posted on-site in a conspicuous location and enclosed in a weather-proof sheath or other similar device.

4. Residential Erosion & Sedimentation Control and Tree Protection Agreement Form

Step 1. Application Form: Obtain a Residential Erosion & Sedimentation Control and Tree Protection Agreement Form; fill out and submit allong with application for a building permit.

Step 2. Requirements: Must protect enough trees somewhere on the lot to meet the Fulton County minimum of 15 tree units per acre.

See Appendix I. to review a copy of the Residential Erosion & Sedimentation Control & Tree Protection Agreement Form.

B. TREE PROTECTION

1. Standards For Specimen And Heritage Trees And Stands of Trees

Specimen and Heritage Tree: Any tree in fair or better condition which equals or exceeds the following diameter sizes.

Tree Type	Tree Diameter Size	Examples	
Large hardwoods	27" d.b.h.	Oak, Hickory, Yellow Poplar,Sweetgum, etc.	
Large hardwood	24" d.b.h.	Beech	
Large softwoods	24" d.b.h.	Pine, Deodar Cedar	
Small Native Flowering	10" d.b.h.	Dogwood, Redbud, Sourwood	

A tree in fair or better condition must meet the following minimum standards:

- A life expectancy of greater than 10 years.
- b. A relatively sound and solid trunk with no extensive decay or hollow, and less than 20 percent radial trunk dieback.
- c. No more than one major and several minor dead limbs (hardwoods only).
- d. No major insect or pathological problem.
- e. A lesser sized tree can be considered a specimen if it is a rare or unusual species, of exceptional guality, or of historical significance.
- f. A lesser size tree can be considered a specimen if it is specifically used by a builder, developer, or design professional as a focal point in a project or landscape.

Specimen Tree Stands:

A contiguous grouping of trees which has been determined to be of value by the Director of the Department or Authorized designee(s). Determination is based upon any one or more of the following criteria:

- a. A relatively mature even-aged stand.
- b. A stand with purity of species composition or of a rare or unusual nature.
- c. A stand of historical significance.
- d. A stand with exceptional aesthetic quality.

2. Methods of Tree Protection

a. Planning consideration

Root space is the most critical factor in tree protection throughout the development process. The root system of trees easily goes beyond the dripline of the tree canopy. Disturbance within the root zone can directly affect a tree's chances for survival. To protect the root zone the following standards shall apply:

- 1. The use of tree save areas is encouraged. This will facilitate overall site organization as related to tree protection.
- 2. The root protection zone of specimen trees, heritage trees, undisturbed buffers, stands of trees or otherwise designated tree save areas shall include no less than the area of a circle with a radius that extends one foot out for every inch of trunk diameter, or the area of a circle with a radius extending from a tree's trunk to a point no less than the end of a tree's longest branch, **whichever is greater**. In some instances, the County Arborist or authorized agent(s) may require an additional area of no disturbance upt to 10 feet outside the root protection zone. (See Appendix A. Typical Root Protection Zone)
- 3. Layout of the project site utility and grading plans must accommodate the required tree protective zones. Utilities must be placed along corridors between protective zones.
- 4. Construction site activities such as parking, material storage, bury pits, concrete washout, burnhole placement, etc., shall not be allowed within tree

protection zones.

5. No disturbance shall occur within the protection zone of specimen and heritage trees or stands of trees.

b. Protective Barriers

- Protective tree fencing shall be installed a minimum of 3 feet beyond the outer edge of the root protection zone for all specimen trees, heritage trees, stands of trees, or otherwise designated tree protection zones, <u>prior to any land</u> <u>disturbance</u>.
- 2. Acceptable Tree Fencing Procedures
 - A minimum of 4 feet high, constructed in a post and rail configuration. A 2 inch x 4 inch post and a double 1 inch x 4 inch rail is recommended.
 - Four foot orange polyethylene laminar safety fencing.
 - Any deviation from the two acceptable tree fencing methods listed above must be authorized by the County Arborist or designated agent(s).
 - All tree protection fences must be accompanied by "Stay Out" and "Tree Save" signage. Contact the Department for information regarding the purchase of tree protection signs.
- 3. A stop work order or notice of violation will be issued if project is found to be out of compliance with the Tree Protection/Landscape Plan.
- 4. All specimen trees, heritage trees, stands of trees or otherwise designated tree protection zones must be protected from silt.
 - Silt fencing reinforced with wire mesh fencing must be placed along the outer uphill edge of tree protection zones at the land disturbance interface.
 - Silt fencing should be backed by 12 gauge, 2 inch x 4 inch wire mesh fencing in areas of steep slope. (Steep slopes are defined as greater than 3H:1 V).
 - All erosion control measures must comply with Fulton County Erosion Control Standards.
- 5. All tree fencing and erosion control barriers must be installed prior to and maintained throughout the land disturbance process and building construction and may not be removed until the certificate of occupancy is approved and issued by the Director of the Department or a designated agent(s).

C. REVEGETATION

1. Tree Replacement

a. The replacement of trees to satisfy the conditions of zoning, requirements of the Fulton County Zoning Resolution or the Tree Preservation Ordinance and Administrative

Guidelines, may occur under the following situations:

- To establish the minimum tree density requirements for the site, where grading occurs outside the buildable area of the lot.
- If the lot's buildable area leaves no protected zone.
- If no trees are present within an existing protected zone.
- Where specimen trees or stands of trees and trees within otherwise designated tree protection zones have been irreparably damaged or removed through land disturbance or construction activities.

<u>NOTE</u>: Unless enough exisitng trees are saved on site to satisfy density requirements, proposed replacement trees will have to be bonded off prior to issuance of the Land Disturbance Permit.

- b. The quantity of replacement trees into a site must be sufficient so as to produce a total site tree density factor of no less than 15 units per acre. If it has been determined by the County Arborist or designated agent(s) during the initial site visit that the property in question is completely barren of trees and has been for a long time (i.e., pasture land), then the units for replacement trees will be doubled. (For example, a 4 inch replacement tree is currently equivalent to 0.7 units; at a site determined to be barren of trees, the replacement units will be equivalent to 1.4 instead of 0.7 units.) The site will still be required to meet the 15 unit per acre site tree density requirement. (Note: the terms unit and tree are NOT interchangeable). Procedures for determining the site density requirements and the subsequent tree replacement requirements are provided in Table 1.0 and Table 2.0 in the next section. No more than 30% of the replacement trees can be pines. At least 70% of replacement trees must be hardwoods of at least 4 different species.
- c. The spacing of replacement trees must be compatible with spatial limitations and with responsible consideration towards potential species size.
- d. Where the County Arborist or designated agent(s) has determined that site spatial constraints result in the inability to provide for all the required trees, as many trees as possible must be planted on site. The remaining balance of required trees must be planted on public properties using the Tree Bank alternative or the installed cost of the remaining balance of required trees must be contributed to the Tree Replacement Fund in the form of a certified check. A Conservation Easement on a greenspace can also be deeded to the County as compensation for specimen trees removed or to meet site tree density. (Contact senior arborist for details on conservation easement.)

2. Specimen Tree Recompense

a. Any and all healthy specimen trees that the Fulton County Arborist allows a developer/builder/homeowner to remove must be compensated for. Specimen hardwood trees have to be compensated for with either 2" or 4" caliper hardwood trees. Specimen evergreen trees have to be compensated for with either 2" or 4" caliper Southern Magnolias, Deodar Cedars, Canadian Hemlocks, or Cryptomerias. Specimen native flowering trees have to be compensated for with either 2" or 4" caliper hardwood trees. Four (4) different species (minimum) of recompense trees must be

used if the number of recompense trees required is forty (40) or greater. For purposes of recompense trees <u>only</u>, the unit value of a 2" caliper *recompense* tree will be .35 units, not its usual .5 unit value. Any and all specimen trees that are slated for removal must have their recompense trees bonded off prior to issuance of the land disturbance permit.

If a specimen tree or trees are removed or have their root protection zones disturbed without permission, the unit value of the specimen tree is doubled and that becomes the unit value that must be compensated for. For example: A 30" DBH tree is normally worth 14.7 units. If it is removed or its root protection zone disturbed without permission its unit value will double to 29.4 units. Thus 29.4 units of 2" or 4" caliper trees will have to be replaced at the project site. Recompense trees **cannot** be used to satisfy any other landscape requirement such as parking lot shade trees, landscape strip, undisturbed buffer or detention pond buffer trees. They can, however, count toward the required tree density for the site. 2" caliper recompense trees that are counted for density will be worth .35 units per tree.

TREE BANK

Arrangements will be made through the County Arborist. If the tree bank is an alternative for your development, then the following criteria must be observed:

- The tree bank site location must be in the same planning area of the county (defined in the Comprehensive Plan) as the project site. South Fulton, SW Fulton)
- Four different species needed if total quantity of trees to be banked is 40 or greater.
- Each tree bank tree must be 2 inch caliper size at a minimum; 2 inch or 4 inch caliper required for recompense trees.
- All tree bank trees must be grade "A" quality trees with straight trunks and dense foliage and free from injury, pests, disease or nutritional disorders.
- All tree bank trees are to be guaranteed for 1 full year after planting by the developer. Any trees that die within this time period must be replaced by the developer.
- The following notes must be shown on the approved tree protection plan:

WHEN THE OWNER/DEVELOPER/CONTRACTOR CALLS THE ARBORIST'S OFFICE 404-612-7531 FOR A FINAL INSPECTION, THE OWNER/DEVELOPER/CONTRACTOR SHALL INFORM THE ARBORIST THAT THE SITE VISIT INCLUDES A SITE VISIT TO A PUBLIC PROPERTY TO INSPECT TREES THAT HAVE BEEN TREE BANKED.

ANY CHANGES IN TREE VARIETY MUST BE APPROVED IN WRITING BY THE FULTON COUNTY ARBORIST'S OFFICE AT 404-612-7531. PLANTING MUST BE COMPLETED BY THE OWNER/DEVELOPER AND THE PLANTING MUST BE INSPECTED AND APPROVED BY THE FULTON COUNTY ARBORIST OR SENIOR ARBORIST PRIOR TO THE ARBORIST'S OR SENIOR ARBORIST'S SIGN-OFF ON THE CERTIFICATE OF OCCUPANCY OR FINAL PLAT RECORDING FOR THE PROJECT.

TREE REPLACEMENT FUND

Arrangements will be made through the County Arborist. If the tree banking alternative is not desirable, then the tree replacement fund is another alternative to help your development meet its tree density or recompense tree requirements. If the Tree Replacement Fund is an alternative for your development, then the following criteria must be observed:

- Tree replacement cost shall be a price determined by the Fulton County Arborist based on the average current market cost for grade "A" quality, healthy trees.
- The required replacement fee will be 100 percent (%) of the total cost to plant the balance of trees that were unable to be planted to satisfy the site density requirement or recompense tree requirements.
- Species selected for replacement must be grade "A" quality, healthy trees and must be ecologically compatible with the specifically intended growing site. Standards for transplanting and selecting quality replacement stock are provided in Transplanting Standards Section. A site specific tree list will be provided by the County Arborist upon request.

Notice: The primary use of the Tree Fund monies is the purchase and installation of Grade A quality trees on Fulton County Government public facilities and rights-of-ways.

For any donation to the Tree Fund, up to 30 percent of the funds donated may be used by Fulton County to purchase woody shrubs, sod, flowers and bulbs, and natural mulch.

2. Procedures for Calculating the Required Tree Replacement Density Factors (The Tree Density Factor Requirement for property located within Agricultural Districts is 15 units per acre.)

Step 1

Calculate the <u>density factor for the site</u> (DFS) by multiplying the number of site acres by 15. EXAMPLE: A 2.2 acre site has a DFS of 2.2 x 15= 33.

Step 2

Calculate the <u>existing density factor (EDF)</u> of trees which will remain on the site to be protected during construction. EDF is determined by converting the D.B.H. of individual existing trees to density factor units, using Table 1.0. These units are then totaled to determine the EDF for the site.

EXAMPLE: A total of 5 trees will remain on the 2.2 acre site in Step 1. These trees include:

When converted to density factor units using Table 1.0, we arrive at the following values:

Quantity	Size	Tree type
3	18'	Oak
1	20"	Hickory
1	30"	Oak

D.B.H.	Units		# Trees		
18"	4.0	Χ	3	Ш	12.0
20"	4.0	Χ	1	Ш	4.0
30"	14.7	Χ	1	=	14.7
The sum to	tal of unit	s, 30.7	is the EDF, existin	EDF total	30.7

Step 3

Calculate the required replacement density factor (RDF) by subtracting the existing density factor, (EDF) in (Step 2) from the density factor for the site (DFS) in (Step 1).

Example:

RDF	=	DFS	•	EDF
RDF	=	33.0	-	30.7
RDF	=	2.3		

Step 4

The RDF can be converted back to caliper inches using Table 2.0. Any number or combination of transplantable size trees can be used so long as their total density factor units will equal or exceed the RDF.

Example: On the 2.2 acre site the following number and size of trees will be planted:

No.	Size	Species	Density Factor Units	DF x Number =	Total
3	2"	PINE	0.5	3x0.5=	1.50
2	3"	RED MAPLE	0.6	2 x 0.6 =	1.20
				replacement density factor < or = to	2.70

^{2.70} is the sum of the transplantable trees for the site. Because the sum of the transplantable trees for the site is greater than the RDF, which is 2.30, the project's site density has been satisfied.

Conversion Tables

TABLE 1.0 – EXISTING TREES TO REMAIN

Conversion from D.B.H. to density factor units for trees remaining on the site.

D.B.H.	Units	D.B.H.	Units	D.B.H.	Units
1-4	0.4	36	21.3	59	56.9
5-7	1.2	37	22.5	60	58.9
8-9	2.0	38	23.7	61	60.8
10	2.4	39	24.9	62	62.8
11	2.8	40	26.1	63	64.9
12	3.2	41	27.6	64	67.0
13-15	3.6	42	28.8	65	69.1
16-20	4.0	43	30.3	66	71.2
21	4.8	44	31.8	67	73.4
22	5.2	45	33.0	68	75.6
23	8.7	46	34.5	69	77.9
24	9.3	47	36.0	70	80.1
25	10.2	48	37.8	71	82.4
26	11.1	49	39.3	72	84.8
27	12.0	50	40.8	73	87.1
28	12.9	51	42.7	74	89.6
29	13.8	52	44.2	75	92.0
30	14.7	53	45.9	76	94.5
31	15.6	54	47.7	77	97.0

32	16.8	55	49.4	78	99.5
33	17.7	56	51.3	79	102.1
34	18.9	57	53.1	80	104.7
35	20.1	58	55.0		

TABLE 2.0 – REPLACEMENT TREES

Conversion from caliper to density factor units for replacement trees.

CALIPER	UNITS	CALIPER	UNITS
1	0.4	8	1.3
2	0.5	9	1.5
3	0.6	10	1.7
4	0.7	11	1.9
5	0.9	12	2.1
6	1.0	13	2.3
7	1.2	14	2.5

Container grown pine trees are given replacement credit as follows:

SIZE	UNITS
7 Gallon	0.4
3 Gallon*	0.2

*The use of 3 gallon pines is permitted only with prior approval

Tree relocation: Replacement units may be granted to trees relocated on site. Tree relocation is subject to the Senior Arborist's or designated agent(s) approval.

3. Standards for Selecting Quality Replacement Stock

- a. Trees selected for planting must meet the minimum requirements as provided in Tables 3.0 through 8.0 provided at the end of this section.
- b. Trees selected for planting must be free from injury, pests, disease, or nutritional disorders.
- c. Trees selected for planting must be of good vigor. The determination of vigor is a subjective evaluation and dependent upon species variability. The following criteria are generally used for the determination of vigor:
 - 1. Foliage should have a green or dark green color. Vigorous trees will have large leaves and dense foliage when compared to trees with poor vigor.
 - 2. Shoot growth for most vigorous trees will be at least 1 foot per year. At least ½ of the branches should arise from points on the lower 2/3 of a trunk.
 - 3. Bark texture can denote vigor. Smooth or shiny bark on the trunk and branches of a young tree usually signifies good vigor, conversely, rough and dull bark could indicate poor vigor.

- Trunk taper: the trunks of vigorous trees will generally have an increase in diameter with a decrease in height. Trees with reverse tapers or no taper should be avoided.
- 5. Root color: young roots of most trees will be light in color.
- d. Trees selected for planting must be free of root defects. Two types of root defects generally occur:
 - 1. Kinked roots, in which taproots, major branch roots, or both are bent more than 90 degrees with less than 20 percent of the root system originating above the kink. A tree with such roots will probably bend at the soil line when released from a supporting stake.
 - 2. Circling or girdling roots which circle 80 percent or more of the root system by 360 degrees or more. A tree with such roots would ultimately have less than 20 percent of its system available for support.

4. Planting Minimum Requirement Tables

Table 3.0 - CALIPER TO HEIGHT RATIOS FOR DECIDUOUS TREES

STANDARD SI	SLOW	GROWING TREES	SMALL UPRIGHT	
CALIPER IN INCHES	AVERAGE RANGE	MAXIMUM / MINIMUM		AVERAGE RANGE
	HEIGHT IN FEET	H	EIGHT IN FEET	HEIGHT IN FEET
5/16	-	-		2 To 3
7/16	1	-		3 To 4
9/16	1	-		4 To 5
11/16	1	-		5 To 6
7/8	1	-		6 To 8
½ To ¾	5 To 6	8	3.5	-
3⁄4 To 1	6 To 8	10	4	-
1 To ¼	8 To 10	11	5.5	-
1 1/4 To 1 ½	8 To 10	12	6.5	-
1 ½ To 1 ¾	10 To 12	14	6.5	-
1 ¾ To 2	10 To 12	14	6.5	-
2 To 2 ½	12 To 14	16	8	-
2 ½ To 3	12 To 14	16	8	-
3 To 3 ½	14 To 16	18	9.5	-
3 ½ To 4	14 To 16	18	9.5	-
4 To 5	16 To 18	22	10.5	-
5 To 6	18 AND UP	26	12	-

Table 4.0 - HEIGHT TO SPREAD RATIO FOR CONIFEROUS NURSEY TREES

HEIGHT IN INCHES	SPREAD RANGE IN INCHES
12 To 15	8 To 12
15 To 18	9 To 15
18 To 24	12 To 18
24 To 30	15 To 21
30 To 36	18 To 24
36 To 48	21 To 30
48 To 60	30 To 36
60 To 72	36 To 48

Generally the Height: Spread ratio should be no less than 2:1.

Table 5.0 – CONTAINER SIZE TO RATIO HEIGHT

	DECIDUOUS TREES	CONIFEROUS TREES	
	HEIGHT SIZES		
CONTAINER	IN	IN	
SIZE	FEET	INCHES	
1 GALLON	1 To 1 ½	6 To 9	
5 ½" x 6"	1 ½ To 2	9 To 12	
	2 To 3	12 To 15	
	3 To 4	15 To 18	
		18 To 24	
2 GALLON	2 To 3	12 To 15	
7"x7 ½"	3 To 4	15 To 18	
	4 To 5	18 To 24	
		24 To 30	
5 GALLON	4 To 5	18 To 24	
9" x 10"	5 To 6	24 To 30	
	6 To 8	30 To 36	
	-	36 To 42	
	-	42 To 48	

Table 6.0 – MINIMUM ROOT SPREAD AND BALL DIAMETER FOR DECIDUOUS TREES

CALIPER	BARE ROOT DIAMETER SPREAD FOR ALL TREES	BALL DIAMETER FOR STANDARD AND SLOW GROWING BALL AND BURLAP TREES		BALL DIAMETERS FOR SMALL UPRIGHTTREES
INCHES	INCHES	INCHES	HEIGHT IN FEET	DIAMETER INCHES
½ To ¾	12	12	2To3	10
3⁄4 To 1	16	14	3 To 4	12
1 To 1 1/4	18	16	4 To 5	14
1 ½ To 1 ¾	20	18	5 To 6	16
1 ¼ To 1 ½	22	20	6 To 7	18
1 ¾ To 2	24	22	7 To 8	20
2 To 2 ½	28	24	8 To 9	22
2 ½To 3	32	28	9 To 10	24
3 To 3 ½	38	32	10 To 12	26
3 ½ To 4	-	38	-	-
4 To 4 ½	-	42	-	-
4 ½ To 5	-	48	-	-
5 To 5 ½	-	54	-	-

Table 7.0 – RECOMMENDED BALL DIMENSIONS FOR LARGE TREES

TREE DIAMETER	BALL DIAMETER	BALL DEPTH	APPROXIMATE WEIGHT OF BALL AND TREE
INCHES	FEET	INCHES	TONS
5	4	30	1.5
6	5	32	2.4
7	6	34	3.7
8	7	36	5.4
9	7'/2	36	6.2
10	8	38	7.4
11	9	40	9.9
12	10	40	12.2

Table 8.0 - RECOMMENDED MINIMUM BALL DIAMETERS FOR BALL AND BURLAP CONIFEROUS TREES

HEIGHT IN FEET	DIAMETER IN INCHES
1'/2 To 2	10
2 To 3	12
3 To 4	14
4 To 5	16
5 To 6	20
6 To 7	22
7 To 8	24
8 To 9	27
9 To 10	30

10 To 12	34
12 To 14	38
14 To 16	42
18 To 20	50

5. Transplanting Standards

- a. The transplanting of new trees can result in major injury to their root system. If proper transplanting techniques are employed, conditions will be more favorable for tree recovery, and the rate of attrition for newly planted trees will be reduced.
- b. Transplanting procedures shall follow standards established by the International Society of Arboriculture in the "Trees and Shrub Transplanting Manual". The following is a summary of several of the more important considerations provided in the manual.
 - Pre-Planting Considerations
 - Only healthy trees with a well developed root system and a well formed top, characteristic of the species, should be planted. Standards for selecting quality stock are provided in Section C. Revegetation.
 - Trees selected for planting must be compatible with the specific site conditions. A site specific tree list will be provided by the County Arborist upon request.
 - The ability of a species to regenerate a new root system and to become reestablished should be considered. Deciduous and evergreen trees should be planted between November and February. Trees planted outside of this time period will NOT be accepted by Fulton County unless a bond is submitted to guarantee their replanting if they die.

c. Planting procedures

- Planting holes should be no less than 1 foot wider than the root ball or bare roots of the tree being planted. A planting hole 3 times the width of the root ball is recommended.
- Trees should not be planted deeper than they were in their former location or container.
- Spade compacted bottom and sides of the planting hole should be roughed or scarified to allow the penetration of developing roots.

- Good water drainage from the bottom of the planting hole is essential for root regeneration.
- Once the transplanted tree is set, the hole should be backfilled with soil of good texture and structure. Traditionally, backfill material is comprised of a mix of native soil, organic matter such as peat, and inorganic material such as pearlite or vermiculite in a 1:1:1 ratio. A back fill with native soil alone is adequate if the soil is of good quality.
- The addition of fertilizer to backfill soil can cause root injury, and is therefore not recommended. If fertilizer must be added, a low rate should be used. Approximately 1.5 pounds of nitrogen per cubic yard of back fill is recommended for bare root plants, and 2.5 pounds of nitrogen per cubic yard of back fill for balled and burlaped trees.
- The back fill should be gently tamped (but not compacted), and soaked for settling.
- The soil should be slightly mounded to allow for settling; a ridge or dike around the perimeter of the hole can facilitate watering.

d. Post-planting procedures

- Pruning. The amount of pruning necessary for newly planted trees depends upon the trees' response to planting. A decrease in leaf surface area from pruning can result in a reduction of the production of food, thus ultimately inhibiting root development. Pruning for vigor or to train young trees should therefore be delayed until after the first growing season.
- Pruning is recommended during the first growing season if the tree is showing "transplant shock" or drought symptoms (wilting), or for the removal of weak, broken, or diseased branches. For correct prunning of trees, always follow the ANSI A300 standard practice for prunning.
- The use of commercially available anti-transpirants is recommended for deciduous trees transplanted while in foliage, if the trees begin to wilt. Anti-transpirants are chemical foliage sprays that reduce water loss through the leaf surface.
- Staking should be used on newly planted trees only where determined necessary. The extent of staking will depend upon tree strength, form and condition at planting, expected wind conditions, the amount of vehicle or foot traffic, and the level of follow-up maintenance. Staking can cause tree damage. Periodic follow-up inspections are required to prevent serious tree-

staking problems. Staking should be removed as soon as the tree is capable of providing its own anchorage and support. Recommended types and uses of staking are as follows:

- 1. Protective staking is used to provide a barrier from foot traffic, mowers, vehicles, etc., for trees able to stand without support.
- 2. Anchor staking is used to hold a root ball in place during the period of reestablishment for trees with otherwise adequate support.
- 3. Support staking is used for trees with weak trunks or oversized crowns and unable to stand without support or in wind.
- 4. Guying is recommended where necessary for large transplanted trees (4" D.B.H. or greater) to provide both anchorage and support.
- 5. Mulching newly planted trees will reduce competition from weeds and moderate soil moisture and temperature extremes.
- 6. Fertilizer application should begin after the tree's first full growing season.
- Water availability for the newly planted tree should be monitored and adjusted according to the species water requirements and the site conditions.

D. LANDSCAPE STRIP AND BUFFER STANDARDS

1. Landscape Strips

- a. The width of landscape strips must, as a minimum, conform with the requirements of the conditions of zoning or the requirements of the Zoning Resolution, which ever is greater. The width is measured from the newly dedicated right-of-way, or from the property lines of contiguous parcels, as applicable.
- b. No permanent structures are permitted within landscape strips. This includes, retaining walls, curbing, dumpsters, detention facilities, etc. Monument signs, drainage structures, and sidewalks may be allowed with pre-approval.
- c. Curb stops must be used to prevent vehicle overhang into required landscape strips and parking lot landscape islands. One curb stop per parking stall is required.
- d. Signs within required landscape strips are subject to the approval of the Department or designated agent(s). These signs may only be located in areas of turf or groundcover and must not conflict with the growth potential of trees and shrubs. Signs are not permitted within required undisturbed buffers.

- e. The deposition of storm water runoff into drainage swales through landscape strips is generally not permitted. Exceptions will be considered only if this standard will create an undue hardship to the property owner. Under no circumstances may the width of a drainage easement through a landscape strip exceed the width of the strip.
- f. Parking lot landscape islands must, at a minimum, conform to the requirements of the Zoning Resolution. These islands must be planted with at least one 2 inch caliper (minimum) shade tree. Stormwater runoff into parking lot landscape islands may be permitted upon approval by the County Arborist.
- g. When fencing is required as a condition of rezoning, the finished surface of the fence must face externally to the project. The exact location for fence placement within the landscape strip will be determined on a case by case basis by the County Arborist or designated agent(s).
- h. All species within required landscape strips must be ecologically compatible with the intended growing site. If ornamental trees are used to satisfy landscape strip requirements, they will not count for satisfying tree density requirements. All plant materials are subject to Department or designated agent(s) approval.
- i. Trees within required landscape strips shall be provided as follows:
 - Landscape strips 25 feet wide or less; a minimum of one tree for every 30 linear feet of landscape strip.
 - 2. Landscape strips 25 feet wide or more; a minimum of one tree for every 20 linear feet of landscape strip.
 - 3. Clumping is permitted.
- j. All required landscape strips must be designed with at least 60% coverage in trees and shrubs, with no more than 40% coverage in grass or ground cover. Landscape strip coverage will be calculated as follows:
 - 1. Calculate the total spatial area of the landscape strip.
 - 2. Count the number of trees within the landscape strip and multiply by 100 square feet for trees less than 6" caliper and 200 square feet for trees 6" or greater (This will allow some credit for the spatial coverage of the tree canopy).
 - 3. Calculate the coverage provided by the shrubs planted on center:

ON CENTER	Equals	COVERAGE PER SHRUB
*3 feet	=	9 square feet
*4 feet	=	16 square feet
*5 feet	=	25 square feet

^{*}At maturity, shrubs must attain this width. Shrub species and spacing is subject to Arborist's approval.

4. Grass or ground cover may not exceed 40 % coverage within the strip.

2. Planting Within Rights-of-Way

Approval from the Department, the Department of Facilities and Transportation Services (FTS) and the Georgia Department of Transportation (D.O.T), where applicable, is required, as planting is generally not permitted in the rights-of-way. Where approval is received, the following conditions must be met:

- Indemnification and maintenance agreements must be recorded with the Fulton County Superior Court Clerk, Room 106, 404-612-5371, prior to permitting irrigation or planting within County rights-of-way.
- These agreements must be recorded in the name of a homeowner's association (along with documentation attesting to that association's existence), for subdivisions.
- These agreements must be recorded in the property owner's name for all other types of projects.
- b. Trees planted within rights-of-way cannot be counted toward the tree density requirement for a site.
- Prior to planting trees in rights-of-way, a shoulder cross-section must be provided indicating the placement of the trees in relation to the curb, and underground utilities. Placement and species are subject to the approval of the County Arborist and the Director of Facilities and Transportation Services (FTS).
- c. Drawings for irrigation system within rights-of-way must indicate the location of lines, heads, spray radius, shut off valves, timers and a 24 hour emergency contact phone number.

3. Buffers

- Required undisturbed buffers must remain undisturbed and actively protected in perpetuity under the auspices of the Tree Protection Ordinance and Administrative Guidelines.
- b. Buffers must be replanted where sparsely vegetated or where disturbed for approved access and utility crossings. The buffers should be replanted to meet the following standards:
- Must provide a visual barrier. To accomplish this screening, the plant materials must be a minimum 5 feet in height at time of planting, moderately growing evergreen and have branching all the way to the ground. Slower growing trees may be used if larger materials are planted. All buffer plant materials are subject to the County Arborist or designated agent(s) approval. Please see Appendix J for the list of acceptable evergreen plant material for undisturbed buffers.
- The number of planting rows for tree replacement in buffers is determined by the buffer width:

Buffer Width	Minimum Planting rows
<20'	2
20' to 30'	3
31' to 50'	4
> 50'	4 plus 1 row for each additional 15 feet

- Drainage within or through buffers is subject to the approval of the Department or designated agent(s).
- Encroachment into buffers for the construction of retaining walls, footings, or wall supports, is not permitted unless otherwise specified in the conditions of rezoning. Encroachments into buffers shall require zoning modifications or variances as applicable.
- All buffers require a 10 foot improvement setback interior and adjacent to the buffer. No grading is allowed in this improvement setback unless permission is obtained from the Director of the Department of Environment and Community Development. (Contact Arborist office for details.)

Fulton County Stream Protection Ordinance

The Fulton County Stream Protection Ordinance requires streams in all watersheds within unincorporated South Fulton County to provide a minimum 75-foot undisturbed buffer on each side of the stream as measured from the top of bank. An additional 25-foot setback shall be maintained adjacent to the undisturbed buffer in which all impervious surfaces shall be prohibited. Storm water retention or detention facilities are prohibited within the stream channel.

SECTION III. ADMINISTRATIVE GUIDELINES FOR SINGLE FAMILY RESIDENTIAL DISTRICTS

This set of guidelines shall apply to land uses within Unincorporated Fulton County's Single Family Residential District. The Single Family Residential District is intended to encompass lands devoted to residential uses and closely related land uses. (Please see Fulton County Zoning Resolution if you need more detail regarding land uses within this Land Use District).

A. PROCEDURES

1. Land Disturbance Permits

a. **Step 1.** Application Forms
Filing application forms and obtaining Ordinance and Administrative Guidelines information.

b. **Step 2.** Tree Protection Plan

A tree protection plan, (TPP) shall be submitted with other permit drawings as part of the land disturbance permit process. This plan may either be a separate drawing or part of the landscape plan and shall include the following information:

- 1. Tree Protection Details, detail drawings of tree protection measures and landscape strips (whichever is applicable or both).
- Protective tree fencing.
- Erosion control fencing.
- Tree protection signs.
- Transplanting specifications.
- Tree wells.
- Staking specifications.
- Other applicable drawings.
- Landscape installation plans, planting details, plant list

2. Spatial Limits

- Definition of spatial limits.
- Limits of land disturbance, clearing, grading and trenching.
- Tree protection zones.
- Specimen trees or stands of trees.
- Areas of revegetation and tree density calculations.
- State waters buffers and/or tributary buffers.
- 3. Implementation Schedule
- Procedures and schedules for the implementation, installation and maintenance of tree protection measures.

c. Step 3. Review Process

These plans shall be reviewed by the County Arborist or designated agent(s) for conformance with:

- Overlay District Regulations
- Fulton County Zoning Resolution
- Applicable Zoning, Use Permit and/or Variance Conditions
- Tree Preservation Ordinance & Administrative Standards
- Any and all Ordinances and Administrative Guideliness dealing with natural resources
- 1. Plans will be either approved or returned for revisions.
- 2. Reasons for denial shall be stated in writing on the tree protection plan.

d. **Step 4.** Tree Protection Measures

All tree protection measures shall be installed by the contractor and then inspected by the County Arborist or designated agent(s) prior to land disturbance.

e. **Step 5.** Land Disturbance Permit

Issuance of the land disturbance permit is contingent upon approval of the Tree Protection Plan.

f. **Step 6.** Follow-up

The County Arborist will conduct follow-up site inspections for enforcement of the Tree Preservation Ordinance and its Administrative Guidelines.

2. Rezoning and Special Use Permits

a. **Step 1.** Application Forms

Filing application forms and obtaining Ordinance and Administrative Guideline information.

b. **Step 2.** Case Review

The County Arborist may conduct a preliminary review of all rezoning cases and special use permit applications.

c. **Step 3.** Field Review

A field review of cases may occur under the following conditions:

- 1. For community unit plans and major development cases.
- 2. For cases within the Chattahoochee River Corridor.
- 3. Other cases as determined necessary by the preliminary review.
- 4. For cases within overlay districts.

d. **Step 4.** Conditions

Conditions to rezoning may be required as found necessary by the preliminary review. These conditions may either be general or specific in nature and will reflect the standards or provisions of the Tree Preservation Ordinance and Administrative Guideline and/or the Zoning Resolution.

e. **Step 5.** Verification

Compliance with these conditions will be verified by review of a revised site plan prior to the issuance of a land disturbance permit.

3. Timber Harvesting Requirements

For Non Agriculture Land Uses

Pursuant to O.C.G.A. 12-6-24, individuals and companies interested in harvesting timber in unincorporated Fulton County are required to submit a completed Notice of Timber Harvesting Activity to the Fulton County Arborist on a form approved by the Director of the Department. Blank forms are available from the Georgia Forestry Commission or may be obtained from the Department. Prior written notice shall be required of any person or company harvesting timber for each separate tract to be harvested.

Once the Arborist has reviewed the notice and ensured that all the requested information is included, the notice is stamped "*Received*" along with the current day's date. The stamped notice is then returned to the individual overseeing the timbering operation. Timbering can only begin once the stamped notice is posted on-site in a conspicuous location and enclosed in a weather-proof sheath or other similar device.

4. Residential Erosion & Sedimentation Control and Tree Protection Agreement Form

- Step 1. Application Form: Obtain a Residential Erosion & Sedimentation Control and Tree Protection Agreement Form, fill out and submit along with application for a building permit.
- Step 2. Requirements: Must protect enough trees somewhere on the lot to meet the Fulton County minimum of 20 tree units per acre. See Appendix I. to review a copy of the Residential Erosion & Sedimentation Control & Tree Protection Agreement Form.

B. TREE PROTECTION

1. Standards For Specimen And Heritage Trees And Stands of Trees

Specimen and Heritage Tree: Any tree in fair or better condition which equals or exceeds the following diameter sizes.

Tree Type	Tree Diameter Size	Examples
Large hardwoods	27"d.b.h.	Oak, hickory, yellow poplar,
Large Hardwoods	27 d.b.ii.	sweetgum, etc.
Large hardwoods	24"d.b.h.	Beech
Large softwoods	24"d.b.h.	Pine, deodar cedar
Small native flowering	10"d.b.h.	Dogwood, redbud, sourwood

A tree in fair or better condition must meet the following minimum standards:

- a. A life expectancy of greater than 10 years.
- b. A relatively sound and solid trunk with no extensive decay or hollow, and less than 20 percent radial trunk dieback.
- c. No more than one major and several minor dead limbs (hardwoods only).
- d. No major insect or pathological problem.
- e. A lesser sized tree can be considered a specimen if it is a rare or unusual species, of exceptional quality, or of historical significance.
- f. A lesser size tree can be considered a specimen if it is specifically used by a builder, developer, or design professional as a focal point in a project or landscape.

Specimen Tree Stands:

A contiguous grouping of trees which has been determined to be of value by the Director of the Department or Authorized designee(s). Determination is based upon any one or more of the following criteria:

- a. A mature even-aged stand.
- b. A stand with purity of species composition or of a rare or unusual nature.
- c. A stand of historical significance.
- d. A stand with exceptional aesthetic quality.

2. Methods of Tree Protection

a. Planning consideration

Root space is the most critical factor in tree protection throughout the development process. The root system of trees easily goes beyond the dripline of the tree canopy. Disturbance within the root zone can directly affect a tree's chances for survival. To protect the root zone the following standards shall apply:

- 1. The use of tree save areas is encouraged, this will facilitate overall site organization as related to tree protection.
- 2. The root protection zone of specimen trees, heritage trees, undisturbed buffers, stands of trees or otherwise designated tree save areas shall include no less than the area of a circle with a radius that extends one foot out for every inch of trunk diameter, or the area of a circle with a radius extending from a tree's trunk to a point no less than the end of a tree's longest branch, whichever is greater. In some instances, the County Arborist or authorized agent(s) may require an additional area of no disturbance up to 10 feet outside the root protection zone. (See Appendix A. Typical Root Protection Zone)
- 3. Layout of the project site utility and grading plans must accommodate the required tree protection zones. Utilities must be placed along corridors between protection zones.
- 4. Construction site activities such as parking, material storage, bury pits, concrete washout, burnhole placement, etc., shall not be allowed within tree protection zones.

5. No disturbance shall occur within the protection zone of specimen and heritage trees or stands of trees.

b. Protective Barriers

- 1. Protective tree fencing shall be installed a minimum of 3 feet beyond the outer edge of the root protection zone for all specimen trees, heritage trees, stands of trees, or otherwise designated tree protection zones, **prior to any land disturbance**.
- 2. Acceptable Tree Fencing Procedures
 - A minimum of 4 feet high, constructed in a post and rail configuration. A 2 inch x 4 inch post and a double 1 inch x 4 inch rail is recommended.
 - Four foot orange polyethylene laminar safety fencing.
 - Any deviation from the two acceptable tree fencing methods listed above must be authorized by the County Arborist or designated agent(s).
 - All tree protection fences must be accompanied by "Stay Out" and "Tree Save" signage. Contact the Department for information regarding the purchase of tree protection signs.
- 3. A stop work order or notice of violation will be issued if project is found to be out of compliance with the Tree Protection/ Landscape Plan.
- 4. All specimen trees, heritage trees, stands of trees or otherwise designated tree protection zones must be protected from silt.
 - Silt fencing reinforced with wire mesh fencing must be placed along the outer uphill edge of tree protection zones at the land disturbance interface.
 - Silt fencing should be backed by 12 gauge, 2 inch x 4 inch wire mesh fencing in areas of steep slope. (Steep slopes are defined as greater than 3H:1 V).
 - All erosion control measures must comply with Fulton County Erosion Control Standards.
- 5. All tree fencing and erosion control barriers must be installed prior to and maintained throughout the land disturbance process and building construction and may not be removed until the certificate of occupancy is approved and issued by the Director of the Department or a designated agent(s).

C. REVEGETATION

1. Tree Replacement

- a. The replacement of trees to satisfy the conditions of zoning, requirements of the Fulton County Zoning Resolution or the Tree Preservation Ordinance and Administrative Guidelines, may occur under the following situations:
 - To establish the minimum tree density requirements for the site, where grading occurs outside the buildable area of the lot.
 - If the lot's buildable area leaves no protected zone.
 - If no trees are present within an existing protected zone.
 - Where specimen trees or stands of trees and trees within otherwise designated tree protective zones have been irreparably damaged or removed through land disturbance or construction activities.

<u>NOTE</u>: Unless enough exisitng trees are saved on site to satisfy density requirements, proposed replacement trees will have to be bonded off prior to issuance of the Land Disturbance Permit.

b. The quantity of replacement trees into a site must be sufficient so as to produce a total site-tree density factor of no less than 20 units per acre. If it has been determined by the County Arborist or designated agent(s) during the initial site visit that the property in question is completely barren of trees and has been for a long time (ie, pasture land), then the units for replacement trees will be doubled. (For example, a 4 inch replacement tree is currently equivalent to 0.7 units, at a site where it is determined to be barren of trees, the replacement units will be equivalent to 1.4 instead of 0.7 units.) The site will still be required to meet the 20 unit per acre site tree density requirement.

(<u>Note:</u> the terms unit and tree are <u>NOT</u> interchangeable). Procedures for determining the site density requirements and the subsequent tree replacement requirements are provided in Table 1.0 and Table 2.0 in the next section. No more than 30% of replacement trees can be pines. At least 70% of replacement trees must be hardwoods of at least 4 different species.

- c. The spacing of replacement trees must be compatible with spatial limitations and with responsible consideration towards potential species size.
- d. Where the County Arborist or designated agent(s) has determined that site spatial constraints result in the inability to provide for all the required trees, as many trees as possible must be planted on site. The remaining balance of required trees must be planted on public properties using the Tree Bank alternative or the installed cost of the remaining balance of required trees must be contributed to the Tree Replacement Fund in the form of a certified check. A Conservation Easement on a greenspace can also be deeded to the County as compensation for specimen trees removed or to meet site tree density. (Contact senior Arborist for details on conservation easement.)

2. Specimen Tree Recompense

a. Any and all healthy specimen trees that the Fulton County Arborist allows a developer/builder/homeowner to remove must be compensated for. Specimen hardwood trees have to be compensated for with either 2" or 4" caliper hardwood trees. Specimen evergreen trees have to be compensated for with either 2" or 4" caliper Southern Magnolias, Deodar Cedars, Canadian Hemlocks, or Cryptomerias. Specimen native flowering trees have to be compensated for with either 2" or 4" caliper hardwood trees. Four (4) different species (minimum) of recompense trees must be used if the number of recompense trees required is forty (40) or greater. For purposes of recompense trees only, the unit value of a 2" caliper recompense tree will be .35 units, not its usual .5 unit value. Any and all specimen trees that are slated for removal must have their recompense trees bonded off prior to issuance of the land disturbance permit.

If a specimen tree or trees are removed or have their root protection zones disturbed without permission, the unit value of the specimen tree is doubled and that becomes the unit value that must be compensated for. For example: A 30" DBH tree is normally worth 14.7 units. If it is removed or its root protection zone disturbed without permission its unit value will double to 29.4 units. Thus 29.4 units of 2" or 4" caliper trees will have to be replaced at the project site. Recompense trees **cannot** be used to satisfy any other landscape requirement such as parking lot shade trees, landscape strip, undisturbed buffer or detention pond buffer trees. They can, however, count toward the required tree density for the site. 2" caliper recompense trees that are counted for density will be worth .35 units per tree.

TREE BANK

Arrangements will be made through the County Arborist. If the tree bank is an alternative for your development, then the following criteria must be observed:

- The tree bank site location must be in the same planning area of the county (defined in the Comprehensive Plan) as the project site. South Fulton, SW Fulton)
- Four different species needed if total quantity of trees to be banked is 40 or greater.
- Each tree bank tree must be 2 inch caliper size at a minimum; 2 inch or 4 inch caliper required for recompense trees.
- All tree bank trees must be grade "A" quality trees with straight trunks and dense foliage and free from injury, pests, disease or nutritional disorders.
- All tree bank trees are to be guaranteed for 1 full year after planting by the developer. Any trees that die within this time period must be replaced by the developer.
- The following notes must be shown on the approved tree protection plan:

WHEN THE OWNER/DEVELOPER/CONTRACTOR CALLS THE ARBORIST'S OFFICE 404-612-7531 FOR A FINAL INSPECTION, THE OWNER/DEVELOPER/CONTRACTOR SHALL INFORM THE ARBORIST THAT THE SITE VISIT INCLUDES A SITE VISIT TO A PUBLIC PROPERTY TO INSPECT TREES THAT HAVE BEEN TREE BANKED.

ANY CHANGES IN TREE VARIETY MUST BE APPROVED IN WRITING BY THE FULTON COUNTY ARBORIST'S OFFICE AT 404-612-7531.

PLANTING MUST BE COMPLETED BY THE OWNER/DEVELOPER AND THE PLANTING MUST BE INSPECTED AND APPROVED BY THE FULTON COUNTY ARBORIST OR SENIOR ARBORIST PRIOR TO THE ARBORIST'S OR SENIOR ARBORIST'S SIGN-OFF ON THE CERTIFICATE OF OCCUPANCY OR FINAL PLAT RECORDING FOR THE PROJECT.

TREE REPLACEMENT FUND

Arrangements will be made through the County Arborist. If the tree banking alternative is not desirable, then the tree replacement fund is another alternative to help your development meet its tree density or recompense tree requirements. If the Tree Replacement Fund is an alternative for your development, then the following criteria must be observed:

- Tree replacement cost shall be a price determined by the Fulton County Arborist based on the average current market cost for grade "A" quality, healthy trees.
- The required replacement fee will be 100 percent (%) of the total cost to plant the balance of trees that were unable to be planted to satisfy the site density requirement or recompense tree requirements.
- Species selected for replacement must be grade "A" quality, healthy trees and must be ecologically compatible with the specifically intended growing site. Standards for transplanting and selecting quality replacement stock are provided in Transplanting Standards Section. A site specific tree list will be provided by the County Arborist upon request.

Notice: The primary use of the Tree Fund monies is the purchase and installation of Grade A quality trees on Fulton County Government public facilities and rights-of-ways.

For any donation to the Tree Fund, up to 30 percent of the funds donated may be used by Fulton County to purchase woody shrubs, sod, flowers and bulbs, and natural mulch.

2. Procedure for Calculating the Required Tree Replacement Density Factor The Tree Density Factor Requirement for property located within Single Family Residential Districts is 20 units per acre.

Step 1

Calculate the <u>density factor for the site</u> (DFS) by multiplying the number of site acres by <u>20</u>. **EXAMPLE:** A 2.2 acre site has a DFS of 2.2 x 20= 44.

Step 2

Calculate the <u>existing density factor</u> (EDF) of trees which will remain on site to be protected during construction. EDF is determined by converting the D.B.H. of individual existing trees to density factor units, using Table 1.0. These units are then totaled to determine the EDF for the site.

EXAMPLE: A total of 8 trees will remain on the 2.2 acre site in Step 1. These trees include:

When converted to density factor units using Table 1.0, we arrive at the following values:

quantity	size	tree type	
2	12"	pine	
2	14"	pine Step	. ⊺
2	18 ¹¹	oak Cald	ulate () 2) 1
1	20"		mple
1	30"	Oak	

The sum total of units, 40.3, is the EFD, existing density factor.	
: ate the required replacement density factor (RDF) by subtracting the ED	F

Step 2) from the DFS (Step 1).

RDF	=	44	-	40.3
RDF	=	3.70		

RDF	=	DFS	-	EDF
-----	---	-----	---	-----

Step 4

The RDF can be converted back to caliper inches using Table 2.0. Any number or combination of transplantable size trees can be used so long as their total density factor units will equal or exceed the RDF.

Example: On the 2.2 acre site the following number and size of trees will be planted:

D.B.H.	UNITS		#TREES		
12"	3.2	Х	2	П	6.4
14"	3.6	Х	2	П	7.2
18"	4.0	Х	2	П	8.0
20"	4.0	Х	1	=	4.0
30"	14.7	Х	1	П	14.7
				EDF total	40.3

No.	Size	Species	Density Factor Units	DF x Number =	Total
3	4"	PINE	0.7	3x0.7=	2.10
2	2"	RED MAPLE	0.5	2 x 0.5 =	1.00
1	6"	OAK	1.00	1 x 1.00 =	1.00
				Replacement density factor < or = to	4.10

^{4.10} is the sum of the trasplantable trees for the site. Because the sum of the transplantable trees for the site is greater than the (RDF), which is 3.70, the project's site density has been satisfied.

Conversion Tables

TABLE 1.0 – EXISTING TREES TO REMAIN

Conversion from D.B.H. to density factor units for trees remaining on the site.

D.B.H.	Units	D.B.H.	Units	D.B.H.	Units
1-4	0.4	36	21.3	59	56.9
5-7	1.2	37	22.5	60	58.9
8-9	2.0	38	23.7	61	60.8
10	2.4	39	24.9	62	62.8
11	2.8	40	26.1	63	64.9
12	3.2	41	27.6	64	67.0
13-15	3.6	42	28.8	65	69.1
16-20	4.0	43	30.3	66	71.2
21	4.8	44	31.8	67	73.4
22	5.2	45	33.0	68	75.6

23	8.7	46	34.5	69	77.9
24	9.3	47	36.0	70	80.1
25	10.2	48	37.8	71	82.4
26	11.1	49	39.3	72	84.8
27	12.0	50	40.8	73	87.1
28	12.9	51	42.7	74	89.6
29	13.8	52	44.2	75	92.0
30	14.7	53	45.9	76	94.5
31	15.6	54	47.7	77	97.0
32	16.8	55	49.4	78	99.5
33	17.7	56	51.3	79	102.1
34	18.9	57	53.1	80	104.7
35	20.1	58	55.0		

TABLE 2.0 - REPLACEMENT TREES

Conversion from caliper to density factor units for replacement trees.

		•	
CALIPER	UNITS	CALIPER	UNITS
1	0.40	8	1.30
2	0.50	9	1.50
3	0.60	10	1.70
4	0.70	11	1.90
5	0.90	12	2.10
6	1.00	13	2.30
7	1.20	14	2.50

Container grown pine trees are given replacement credit as follows:

SIZE	UNITS
7 Gallon	0.4
3 Gallon*	0.2

*The use of 3 gallon pines is permitted only with prior approval

Tree relocation: Replacement units may be granted to trees relocated on site. Tree relocation is subject to the Senior Arborist's or designated agent(s) approval.

3. Standards for Selecting Quality Replacement Stock

- a. Trees selected for planting must meet the minimum requirements as provided in Tables 3.0 through 8.0 provided at the end of this section.
- b. Trees selected for planting must be free from injury, pests, disease, or nutritional disorders.
- c. Trees selected for planting must be of good vigor. The determination of vigor is a subjective evaluation and dependent upon species variability. The following criteria are generally used for the determination of vigor:
 - 1. Foliage should have a green or dark green color. Vigorous trees will have large leaves and dense foliage when compared to trees with poor vigor.

- 2. Shoot growth for most vigorous trees will be at least 1 foot per year. At least ½ of the branches should arise from points on the lower 2/3 of a trunk.
- Bark texture can denote vigor. Smooth or shiny bark on the trunk and branches
 of a young tree usually signifies good vigor, conversely, rough and dull bark
 could indicate poor vigor.
- Trunk taper: the trunks of vigorous trees will generally have an increase in diameter with a decrease in height. Trees with reverse tapers or no taper should be avoided.
- 5. Root color: young roots of most trees will be light in color.
- d. Trees selected for planting must be free of root defects. Two types of root defects generally occur:
 - Kinked roots, in which taproots, major branch roots, or both are bent more than 90 degrees with less than 20 percent of the root system originating above the kink. A tree with such roots will probably bend at the soil line when released from a supporting stake.
 - 2. Circling or girdling roots which circle 80 percent or more of the root system by 360 degrees or more. A tree with such roots would ultimately have less than 20 percent of its system available for support.

4. Planting Minimum Requirement Tables

Table 3.0 - CALIPER TO HEIGHT RATIOS FOR DECIDUOUS TREES

STANDARD SHADE TREES		SLOW	GROWING TREES	SMALL UPRIGHT
CALIPER IN INCHES	AVERAGE RANGE	MAX	IMUM / MINIMUM	AVERAGE RANGE
	HEIGHT IN FEET	H	EIGHT IN FEET	HEIGHT IN FEET
5/16	•	-		2 To 3
7/16	-	ı		3 To 4
9/16	1	ı		4 To 5
11/16	-	-		5 To 6
7/8	-	ı		6 To 8
½ To ¾	5 To 6	8	3.5	-
3/4 To 1	6 To 8	10	4	-
1 To 1/4	8 To 10	11	5.5	-
1 1/4 To 1 ½	8 To 10	12	6.5	-
1 ½ To 1 ¾	10 To 12	14	6.5	-
1 ¾ To 2	10 To 12	14	6.5	-
2 To 2 ½	12 To 14	16	8	-
2 ½ To 3	12 To 14	16	8	-

3 To 3 ½	14 To 16	18	9.5	-
3 ½ To 4	14 To 16	18	9.5	-
4 To 5	16 To 18	22	10.5	-
5 To 6	18 AND UP	26	12	-

Table 4.0 - HEIGHT TO SPREAD RATIO FOR CONIFEROUS NURSEY TREES

HEIGHT IN INCHES	SPREAD RANGE IN INCHES
12 To 15	8 To 12
15 To 18	9 To 15
18 To 24	12 To 18
24 To 30	15 To 21
30 To 36	18 To 24
36 To 48	21 To 30
48 To 60	30 To 36
60 To 72	36 To 48

Generally the Height: Spread ratio should be no less than 2:1.

Table 5.0 – CONTAINER SIZE TO RATIO HEIGHT

	DECIDUOUS TREES	CONIFEROUS TREES
	HEIGH	T SIZES
CONTAINER	IN	IN
SIZE	FEET	INCHES
1 GALLON	1 To 1 ½	6 To 9
5 ½" x 6"	1 ½ To 2	9 To 12
	2 To 3	12 To 15
	3 To 4	15 To 18
		18 To 24
2 GALLON	2 To 3	12 To 15
7"x7 ½"	3 To 4	15 To 18
	4 To 5	18 To 24
		24 To 30
5 GALLON	4 To 5	18 To 24
9" x 10"	5 To 6	24 To 30
	6 To 8	30 To 36
	-	36 To 42
	-	42 To 48

Table 6.0 – MINIMUM ROOT SPREAD AND BALL DIAMETER FOR DECIDUOUS TREES

CALIPER	BARE ROOT DIAMETER SPREAD FOR ALL TREES	STANDARD AND	METER FOR SLOW GROWING URLAP TREES	BALL DIAMETERS FOR SMALL UPRIGHTTREES
INCHES	INCHES	INCHES	HEIGHT IN FEET	DIAMETER INCHES
½ To ¾	12	12	2To3	10
3⁄4 To 1	16	14	3 To 4	12
1 To 1 1/4	18	16	4 To 5	14
1 ½ To 1 ¾	20	18	5 To 6	16
1 ¼ To 1 ½	22	20	6 To 7	18
1 ¾ To 2	24	22	7 To 8	20
2 To 2 ½	28	24	8 To 9	22
2 ½To 3	32	28	9 To 10	24
3 To 3 ½	38	32	10 To 12	26
3 ½ To 4	-	38	-	-
4 To 4 ½	-	42	-	-
4 ½ To 5	-	48	-	-
5 To 5 ½	-	54	-	-

Table 7.0 – RECOMMENDED BALL DIMENSIONS FOR LARGE TREES

TREE DIAMETER	BALL DIAMETER	BALL DEPTH	APPROXIMATE WEIGHT OF BALL AND TREE
INCHES	FEET	INCHES	TONS
5	4	30	1.5
6	5	32	2.4
7	6	34	3.7
8	7	36	5.4
9	7'/2	36	6.2
10	8	38	7.4
11	9	40	9.9
12	10	40	12.2

Table 8.0 - RECOMMENDED MINIMUM BALL DIAMETERS FOR BALL AND BURLAP CONIFEROUS TREES

HEIGHT IN FEET	DIAMETER IN INCHES
1'/2 To 2	10
2 To 3	12
3 To 4	14
4 To 5	16
5 To 6	20
6 To 7	22
7 To 8	24
8 To 9	27
9 To 10	30

10 To 12	34
12 To 14	38
14 To 16	42
18 To 20	50

5. Transplanting Standards

- a. The transplanting of new trees can result in major injury to their root system. If proper transplanting techniques are employed, conditions will be more favorable for tree recovery, and the rate of attrition for newly planted trees will be reduced.
- b. Transplanting procedures shall follow standards established by the International Society of Arboriculture in the "Trees and Shrub Transplanting Manual". The following is a summary of several of the more important considerations provided in the manual.
 - Pre-Planting Considerations
 - Only healthy trees with a well developed root system and a well formed top, characteristic of the species, should be planted. Standards for selecting quality stock are provided in Section C. Revegetation.
 - Trees selected for planting must be compatible with the specific site conditions. A site specific tree list will be provided by the County Arborist upon request.
 - The ability of a species to regenerate a new root system and to become reestablished should be considered. Deciduous and evergreen trees should be planted between the end of November and February. Trees planted outside of this time period will NOT be accepted by Fulton County unless a bond is submitted to guarantee their replanting if they die.

c. Planting procedures

- Planting holes should be no less than 1 foot wider than the root ball or bare roots of the tree being planted. A planting hole 3 times the width of the root ball is recommended.
- Trees should not be planted deeper than they were in their former location or container.
- Spade compacted bottom and sides of the planting hole should be roughed or scarified to allow the penetration of developing roots.

- Good water drainage from the bottom of the planting hole is essential for root regeneration.
- Once the transplanted tree is set, the hole should be backfilled with soil of good texture and structure. Traditionally, backfill material is comprised of a mix of native soil, organic matter such as peat, and inorganic material such as pearlite or vermiculite in a 1:1:1 ratio. A back fill with native soil alone is adequate if the soil is of good quality.
- The addition of fertilizer to backfill soil can cause root injury, and is therefore not recommended. If fertilizer must be added, a low rate should be used. Approximately 1.5 pounds of nitrogen per cubic yard of back fill is recommended for bare root plants, and 2.5 pounds of nitrogen per cubic yard of back fill for balled and burlaped trees.
- The back fill should be gently tamped (but not compacted), and soaked for settling.
- The soil should be slightly mounded to allow for settling; a ridge or dike around the perimeter of the hole can facilitate watering.

d. Post-planting procedures

- Pruning. The amount of pruning necessary for newly planted trees depends upon the trees' response to planting. A decrease in leaf surface area from pruning can result in a reduction of the production of food, thus ultimately inhibiting root development. Pruning for vigor or to train young trees should therefore be delayed until after the first growing season.
- Pruning is recommended during the first growing season if the tree is showing "transplant shock" or drought symptoms (wilting), or for the removal of weak, broken, or diseased branches. For correct pruning of trees, always follow the ANSI A300 standard practice for pruning.
- The use of commercially available anti-transpirants is recommended for deciduous trees transplanted while in foliage, if the trees begin to wilt. Anti-transpirants are chemical foliage sprays that reduce water loss through the leaf surface.
- Staking should be used on newly planted trees only where determined necessary. The extent of staking will depend upon tree strength, form and condition at planting, expected wind conditions, the amount of vehicle or foot traffic, and the level of follow-up maintenance. Staking can cause tree

damage. Periodic follow-up inspections are required to prevent serious treestaking problems. Staking should be removed as soon as the tree is capable of providing its own anchorage and support. Recommended types and uses of staking are as follows:

- 1. Protective staking is used to provide a barrier from foot traffic, mowers, vehicles, etc., for trees able to stand without support.
- 2. Anchor staking is used to hold a root ball in place during the period of reestablishment for trees with otherwise adequate support.
- 3. Support staking is used for trees with weak trunks or oversized crowns and unable to stand without support or in wind.
- 4. Guying is recommended where necessary for large transplanted trees (4" D.B.H. or greater) to provide both anchorage and support.
- 5. Mulching newly planted trees will reduce competition from weeds and moderate soil moisture and temperature extremes.
- 6. Fertilizer application should begin after the tree's first full growing season.
- 7. Water availability for the newly planted tree should be monitored and adjusted according to the species water requirements and the site conditions.

D. LANDSCAPE STRIP AND BUFFER STANDARDS

1. Landscape Strips

- a. The width of landscape strips must, as a minimum, conform with the requirements of the conditions of zoning or the requirements of the Zoning Resolution, which ever is greater. The width is measured from the newly dedicated right-of-way, or from the property lines of contiguous parcels, as applicable.
- b. No permanent structures are permitted within landscape strips. This includes retaining walls, curbing, dumpsters, detention facilities, etc. Monument signs, drainage structures, and sidewalks may be allowed with pre-approval.
- c. Curb stops must be used to prevent vehicle overhang into required landscape strips and parking lot landscape islands. One curb stop per parking stall is required.
- d. Signs within required landscape strips are subject to the approval of the Department or designated agent(s). These signs may only be located in areas of turf or groundcover and must not conflict with the growth potential of trees and shrubs. Signs are not permitted within required undisturbed buffers.

- e. The deposition of storm water runoff into drainage swales through landscape strips is generally not permitted. Exceptions will be considered only if this standard will create an undue hardship to the property owner. Under no circumstances may the width of a drainage easement through a landscape strip exceed the width of the strip.
- f. Parking lot landscape islands must, at a minimum, conform to the requirements of the Zoning Resolution. These islands must be planted with at least one 2 inch caliper (minimum) shade tree. Stormwater runoff into parking lot landscape islands may be permitted upon approval by the County Arborist.
- g. When fencing is required as a condition of rezoning, the finished surface of the fence must face externally to the project. The exact location for fence placement within the landscape strip will be determined on a case by case basis by the County Arborist or designated agent(s).
- h. All species within required landscape strips must be ecologically compatible with the intended growing site. If ornamental trees are used to satisfy landscape strip requirements, they will not count for satisfying tree density requirements. All plant materials are subject to the Department of Environment & Community Development or designated agent(s) approval.
- i. Trees within required landscape strips shall be provided as follows:
 - Landscape strips 25 feet wide or less; a minimum of one tree for every 30 linear feet of landscape strip.
 - 2. Landscape strips 25 feet wide or more; a minimum of one tree for every 20 linear feet of landscape strip.
 - 3. Clumping is permitted.
- j. All required landscape strips must be designed with at least 60% coverage in trees and shrubs, with no more than 40% coverage in grass or ground cover. Landscape strip coverage will be calculated as follows:
 - 1. Calculate the total spatial area of the landscape strip.
 - 2. Count the number of trees within the landscape strip and multiply by 100 square feet for trees less than 6" caliper and 200 square feet for trees 6" or greater (This will allow some credit for the spatial coverage of the tree canopy).
 - 3. Calculate the coverage provided by the shrubs planted on center:

ON CENTER	Equals	COVERAGE PER SHRUB
*3 feet	=	9 square feet
*4 feet	=	16 square feet
*5 feet	=	25 square feet

^{*}At maturity, shrubs must attain this width. Shrub species and spacing is subject to Arborist's approval.

4. Grass or ground cover may not exceed 40 % coverage within the strip.

2. Planting Within Rights-of-Way

Approval from the Department, Department of Facilities and Transportation Services and the Georgia Department of Transportation (D.O.T), where applicable, is required, as planting is generally not permitted in the rights-of-way. Where approval is received, the following conditions must be met:

- Indemnification and maintenance agreements must be recorded with the Fulton County Superior Court Clerk, Room 106, 404-612-5371, prior to permitting irrigation or planting within County rights-of-way.
- These agreements must be recorded in the name of a homeowner's association (along with documentation attesting to that association's existence), for subdivisions.
- These agreements must be recorded in the property owner's name for all other types of projects.
- b. Trees planted within rights-of-way cannot be counted toward the tree density requirement for a site.
- Prior to planting trees in rights-of-way, a shoulder cross-section must be provided indicating the placement of the trees in relation to the curb, and underground utilities. Placement and species are subject to the approval of the County Arborist and the Director of Public Works.
- c. Drawings for irrigation system within rights-of-way must indicate the location of lines, heads, spray radius, shut off valves, timers and a 24 hour emergency contact phone number.

3. Buffers

- Required undisturbed buffers must remain undisturbed and actively protected in perpetuity under the auspices of the Tree Protection Ordinance and Administrative Guidelines.
- b. Buffers must be replanted where sparsely vegetated or where disturbed for approved access and utility crossings. The buffers should be replanted to meet the following standards:
- Must provide a visual barrier. To accomplish this screening, the plant materials must be a minimum 5 feet in height at time of planting, moderately growing evergreen and have branching all the way to the ground. Slower growing trees may be used if larger materials are planted. All buffer plant materials are subject to the County Arborist or designated agent(s) approval. Please see Appendix J for the list of acceptable evergreen plant material for undisturbed buffers.
- The number of planting rows for tree replacement in buffers is determined by the buffer width:

Buffer Width	Minimum Planting rows
< 20'	2
20' to 30'	3
31' to 50'	4
> 50'	4 plus 1 row for each additional 15 feet

- Drainage within or through buffers is subject to the approval of the Department or designated agent(s).
- Encroachment into buffers for the construction of retaining walls, footings, or wall supports, is not permitted unless otherwise specified in the conditions of rezoning. Encroachments into buffers shall require zoning modifications or variances as applicable.
- All buffers require a 10 foot improvement setback interior and adjacent to the buffer. No grading is allowed in this improvement setback unless permission is obtained from the Director of the Department (Contact Arborist office for details.)

Fulton County Stream Protection Ordinance

The Fulton County Stream Protection Ordinance requires streams in all watersheds within unincorporated South Fulton County to provide a minimum 75-foot undisturbed buffer on each side of the stream as measured from the top of bank. An additional 25-foot setback shall be maintained adjacent to the undisturbed buffer in which all impervious surfaces shall be prohibited. Storm water retention or detention facilities are prohibited within the stream channel.

SECTION IV. ADMINISTRATIVE GUIDELINES FOR COMMERCIAL AND ALL OTHER NON-SINGLE FAMILY RESIDENTIAL DISTRICTS

This set of guidelines shall apply to land uses within Unincorporated Fulton County's Commercial Districts, Multiple Use Districts, Industrial Park Districts, Two Family and Multiple Family Districts, and all other districts other than Agricultural and Single-Family Districts.

A. PROCEDURES

1. Land Disturbance Permits

a. Step 1. Application Forms
 Filing application forms and obtaining Ordinance

Filing application forms and obtaining Ordinance and Administrative Guideline information.

b. **Step 2.** Tree Protection Plan

A tree protection plan, (TPP) shall be submitted with other permit drawings as part of the land disturbance permit process. This plan may either be a separate drawing or part of the landscape plan and shall include the following information:

- 1. Tree Protection Details, detail drawings of tree protection measures and landscape strips (whichever is applicable or both).
- Protective tree fencing.
- Erosion control fencing.
- Tree protection signs.
- Transplanting specifications.
- Tree wells.
- Staking specifications.
- Other applicable drawings.
- Landscape installation plans, planting details, plant list.
- Spatial Limits
- Definition of spatial limits.
- Limits of land disturbance, clearing, grading and trenching.
- Tree protection zones.
- Specimen trees or stands of trees.
- Areas of revegetation and tree density calculations.
- State waters buffers and/or tributary buffers.
- 3. Implementation Schedule
- Procedures and schedules for the implementation, installation and maintenance of tree protection measures.

c. **Step 3.** Review Process

These plans shall be reviewed by the County Arborist or his designated agent(s) for conformance with:

- Overlay District Regulations
- Fulton County Zoning Resolution
- Applicable Zoning, Use Permit and/or Variance Conditions
- Tree Preservation Ordinance & Administrative Standards
- Any and all Ordinances and Administrative Guideliness dealing with natural resources
- 1. Plans will be either approved or returned for revisions.
- 2. Reasons for denial shall be stated in writing on the tree protection plan.

d. **Step 4.** Tree Protection Measures

All tree protection measures shall be installed by the contractor and then inspected by the County Arborist or designated agent(s) prior to land disturbance.

e. **Step 5.** Land Disturbance Permit

Issuance of the land disturbance permit is contingent upon approval of the Tree Protection Plan.

f. **Step 6.** Follow-up

The County Arborist will conduct follow-up site inspections for enforcement of the Tree Preservation Ordinance and its Administrative Guidelines.

2. Rezoning and Special Use Permits

a. **Step 1.** Application Forms

Filing application forms and obtaining Ordinance and Administrative Guideline information.

b. **Step 2.** Case Review

The County Arborist may conduct a preliminary review of all rezoning cases and special use permit applications.

c. **Step 3.** Field Review

A field review of cases may occur under the following conditions:

- 1. For community units plans and major development cases.
- 2. For cases within the Chattahoochee River Corridor.
- 3. Other cases as determined necessary by the preliminary review.
- 4. For cases within overlay districts.

d. **Step 4.** Conditions

Conditions to rezoning may be required as found necessary by the preliminary review. These conditions may either be general or specific in nature and will reflect the standards or provisions of the Tree Preservation Ordinance and Administrative Guidelines and the Zoning Resolution.

e. **Step 5.** Verification

Compliance with these conditions will be verified by review of a revised site plan prior to the issuance of a land disturbance permit.

3. Timber Harvesting Permit Requirements For Non Agriculture Land Uses

Pursuant to O.C.G.A. 12-6-24, individuals and companies interested in harvesting timber in unincorporated Fulton County are required to submit a completed <u>Notice of Timber Harvesting Activity</u> to the Fulton County Arborist on a form approved by the Director of the Department. Blank forms are available from the Georgia Forestry Commission or may be obtained from the Department. Prior written notice shall be required of any person or company harvesting timber for each separate tract to be harvested.

Once the Arborist has reviewed the notice and ensured that all the requested information is included, the notice is stamped "Received" along with the current day's date. The stamped notice is then returned to the individual overseeing the timbering operation. Timbering can only begin once the stamped notice is posted on-site in a conspicuous location and enclosed in a weather-proof sheath or other similar device.

B. TREE PROTECTION

1. Standards For Specimen And Heritage Trees And Stands of Trees

Specimen and Heritage Tree: Any tree in fair or better condition which equals or exceeds the following diameter sizes.

Tree Type	Tree Diameter Size	Examples
Large hardwoods	27"dbh	Oak, hickory, yellow poplar,
Large nardwoods	27 0011	sweetgum, etc.
Large hardwood	24"dbh	Beech
Large softwoods	24"dbh	Pine, deodar cedar
Small native flowering	10"dbh	Dogwood, redbud, sourwood

A tree in fair or better condition must meet the following minimum standards:

- A life expectancy of greater than 10 years.
- b. A relatively sound and solid trunk with no extensive decay or hollow, and less than 20 percent radial trunk dieback.
- c. No more than one major and several minor dead limbs (hardwoods only).
- d. No major insect or pathological problem.
- e. A lesser sized tree can be considered a specimen if it is a rare or unusual species, of exceptional quality, or of historical significance.
- f. A lesser size tree can be considered a specimen if it is specifically used by a builder, developer, or design professional as a focal point in a project or landscape.

Specimen Tree Stands:

A contiguous grouping of trees which has been determined to be of value by the Director of the Department or Authorized designee(s). Determination is based upon any one or more of the following criteria:

- a. A relatively mature even-aged stand.
- b. A stand with purity of species composition or of a rare or unusual nature.
- c. A stand of historical significance.
- d. A stand with exceptional aesthetic quality.

2. Methods of Tree Protection

a. Planning consideration

Root space is the most critical factor in tree protection throughout the development process. The root system of trees easily goes beyond the dripline of the tree canopy. Disturbance within this root zone can directly affect a tree's chances for survival. To protect the root zone the following standards shall apply:

- 1. The use of tree save areas is encouraged. This will facilitate overall site organization as related to tree protection.
- The root protection zone of specimen trees, heritage trees, undisturbed buffers, stands of trees or otherwise designated tree save areas shall include no less than the area of a circle with a radius that extends one foot out for every inch of

trunk diameter, or the area of a circle with a radius extending from a tree's trunk to a point no less than the end of a tree's longest branch, **whichever is greater**. In some instances, the County Arborist or authorized agent(s) may require an additional area of no disturbance upt to 10 feet outside the root protection zone. (See Appendix A. Typical Root Protection Zone)

- 3. Layout of the project site utility and grading plans must accommodate the required tree protection zones. Utilities must be placed along corridors between protection zones.
- 4. Construction site activities such as parking, material storage, bury pits, concrete washout, burnhole placement, etc., shall not be allowed within tree protection zones.
- 5. No disturbance shall occur within the protection zone of specimen and heritage trees or stands of trees.

b. Protective Barriers

- 1. Protective tree fencing shall be installed a minimum of 3 feet beyond the outer edge of the root protection zone for all specimen trees, heritage trees, stands of trees, or otherwise designated tree protection zones, **prior to any land disturbance**.
- 2. Acceptable Tree Fencing Procedures
 - A minimum of 4 feet high, constructed in a post and rail configuration. A 2 inch x 4 inch post and a double 1 inch x 4 inch rail is recommended.
 - Four foot orange polyethylene laminar safety fencing.
 - Any deviation from the two acceptable tree fencing methods listed above must be authorized by the County Arborist by the County Arborist or designated agent(s).
 - All tree protection fences must be accompanied by "Stay Out" and "Tree Save" signage. Contact the Department of Planning and Community Services for information regarding the purchase of tree protection signs.
- 3. A stop work order or notice of violation will be issued if project is found to be out of compliance with the Tree Protection Plan.
- 4. All specimen trees, heritage trees, stands of trees or otherwise designated tree protection zones must be protected from silt.
 - Silt fencing reinforced with wire mesh fencing must be placed along the outer uphill edge of tree protection zones at the land disturbance interface.
 - Silt fencing should be backed by 12 gauge, 2 inch x 4 inch wire mesh fencing in areas of steep slope. (Steep slopes are defined as greater than 3H:1 V).

- All erosion control measures must comply with Fulton County Erosion Control Standards.
- 5. All tree fencing and erosion control barriers must be installed prior to and maintained throughout the land disturbance process and building construction and may not be removed until the certificate of occupancy is approved and issued by the Director of the Department of Environment and Community Development or a designated agent(s).

C. REVEGETATION

1. Tree Replacement

- a. The replacement of trees to satisfy the conditions of zoning, requirements of the Fulton County Zoning Resolution or the Tree Preservation Ordinance and Administrative Guidelines, may occur under the following situations:
 - To establish the minimum tree density requirements for the site, where grading occurs outside the buildable area of the lot.
 - If the lot's buildable area leaves no protected zone.
 - If no trees are present within an existing protected zone.
 - Where specimen trees or stands of trees and trees within otherwise designated tree protective zones have been irreparably damaged or removed through land disturbance or construction activities.

NOTE: Unless enough existing trees are saved on site to satisfy density requirements, proposed replacement trees trees will have to be bonded off prior to issuance the land disturbance permit

b. The quantity of replacement trees into a site must be sufficient so as to produce a total site-tree density factor of no less than 30 units per acre. If it has been determined by the County Arborist or designated agent(s) during the initial site visit that the property in question is completely barren of trees and has been for a long time (ie, pasture land), then the units for replacement trees will be doubled.

(For example, a 4 inch replacement tree is currently equivalent to 0.7 units, at a site where it is determined to be barren of trees, the replacement units will be equivalent to 1.4 instead of 0.7 units.) The site will still be required to meet the 30 unit per acre site tree density requirement.

(Note: the terms unit and tree are <u>NOT</u> interchangeable). Procedures for determining the site density requirements and the subsequent tree replacement requirements are provided in Table 1.0 and Table 2.0 in the next section. No more than 30% of replacement trees can be pines. At least 70% of replacement trees must be hardwoods of at least 4 different species.

- c. The spacing of replacement trees must be compatible with spatial limitations and with responsible consideration towards potential species size.
- d. Where the County Arborist or designated agent(s) has determined that site spatial constraints result in the inability to provide for all the required trees, as many trees as possible must be planted on site. The remaining balance of required trees must be planted on public properties using the Tree Bank alternative or the installed cost of the remaining balance of required trees must be contributed to the Tree Replacement Fund in the form of a certified check. A Conservation Easement on a greenspace can also be

deeded to the County as compensation for specimen trees removed or to meet site tree density. (Contact senior arborist for details on conservation easement.)

2. Specimen Tree Recompense

a. Any and all healthy specimen trees that the Fulton County Arborist allows a developer/builder/homeowner to remove must be compensated for. Specimen hardwood trees have to be compensated for with either 2" or 4" caliper hardwood trees. Specimen evergreen trees have to be compensated for with either 2" or 4" caliper Southern Magnolias, Deodar Cedars, Canadian Hemlocks, or Cryptomerias. Specimen native flowering trees have to be compensated for with either 2" or 4" caliper hardwood trees. Four (4) different species (minimum) of recompense trees must be used if the number of recompense trees required is forty (40) or greater. For purposes of recompense trees only, the unit value of a 2" caliper recompense tree will be .35 units, not its usual .5 unit value. Any and all specimen trees that are slated for removal must have their recompense trees bonded off prior to issuance of the land disturbance permit.

If a specimen tree or trees are removed or have their root protection zones disturbed without permission, the unit value of the specimen tree is doubled and that becomes the unit value that must be compensated for. For example: A 30" DBH tree is normally worth 14.7 units. If it is removed or its root protection zone disturbed without permission its unit value will double to 29.4 units. Thus 29.4 units of 2" or 4" caliper trees will have to be replaced at the project site. Recompense trees **cannot** be used to satisfy any other landscape requirement such as parking lot shade trees, landscape strip, undisturbed buffer or detention pond buffer trees. They can, however, count toward the required tree density for the site. 2" caliper recompense trees that are counted for density will be worth .35 units per tree.

TREE BANK

Arrangements will be made through the County Arborist. If the tree bank is an alternative for your development, then the following criteria must be observed:

- The tree bank site location must be in the same planning area of the county (defined in the Comprehensive Plan) as the project site. (North Fulton, Sandy Springs, South Fulton, SW Fulton)
- Four different species needed if total quantity of trees to be banked is 40 or greater.
- Each tree bank tree must be 2 inch caliper size at a minimum; 2 inch or 4 inch caliper required for recompense trees.
- All tree bank trees must be grade "A" quality trees with straight trunks and dense foliage and free from injury, pests, disease or nutritional disorders.
- All tree bank trees are to be guaranteed for 1 full year after planting by the developer. Any trees that die within this time period must be replaced by the developer.
- The following notes must be shown on the approved tree protection plan:

WHEN THE OWNER/DEVELOPER/CONTRACTOR CALLS THE ARBORIST'S OFFICE 404-612-7531 FOR A FINAL INSPECTION, THE OWNER/DEVELOPER/ CONTRACTOR SHALL

INFORM THE ARBORIST THAT THE SITE VISIT INCLUDES A SITE VISIT TO A PUBLIC PROPERTY TO INSPECT TREES THAT HAVE BEEN TREE BANKED.

ANY CHANGES IN TREE VARIETY MUST BE APPROVED IN WRITING BY THE FULTON COUNTY ARBORIST'S OFFICE AT 404-612-7531.

PLANTING MUST BE COMPLETED BY THE OWNER/DEVELOPER AND THE PLANTING MUST BE INSPECTED AND APPROVED BY THE FULTON COUNTY ARBORIST OR SENIOR ARBORIST PRIOR TO THE ARBORIST'S OR SENIOR ARBORIST'S SIGN-OFF ON THE CERTIFICATE OF OCCUPANCY OR FINAL PLAT RECORDING FOR THE PROJECT.

TREE REPLACEMENT FUND

Arrangements will be made through the County Arborist. If the tree banking alternative is not desirable, then the tree replacement fund is another alternative to help your development meet its tree density or recompense tree requirements. If the Tree Replacement Fund is an alternative for your development, then the following criteria must be observed:

- Tree replacement cost shall be a price determined by the Fulton County Arborist based on the average current market cost for grade "A" quality, healthy trees.
- The required replacement fee will be 100 percent (%) of the total cost to plant the balance of trees that were unable to be planted to satisfy the site density requirement or recompense tree requirements.
 - Species selected for replacement must be grade "A" quality, healthy trees and must be ecologically compatible with the specifically intended growing site. Standards for transplanting and selecting quality replacement stock are provided in Transplanting Standards Section. A site specific tree list will be provided by the County Arborist upon request.

Notice: The primary use of the Tree Fund monies is the purchase and installation of Grade A quality trees on Fulton County Government public facilities and rights-of-ways.

For any donation to the Tree Fund, up to 30 percent of the funds donated may be used by Fulton County to purchase woody shrubs, sod, flowers and bulbs, and natural mulch.

2. **Procedures for Calculating the Required Tree Replacement Density Factors** The Tree Density Factor Requirement for property located within Commercial Business Districts is 30 units per acre.

Step 1

Calculate the density factor for the site (DFS) by multiplying the number of site acres by 30.

EXAMPLE: A 2.2 acre site has a DFS of 2.2 x 30= 66.

Step 2

Calculate the existing density factor (EDF) of trees which will remain on site to be protected during construction. EDF is determined by converting the D.B.H. of individual existing trees to density factor units, using Table 1.0. These units are then totaled to determine the EDF for the site.

EXAMPLE: A total of 15 trees will remain on the 2.2 acre site in Step 1. When converted to density factor units using Table 1.0, we arrive at the These trees include:

quantity	size	tree type
7	12"	pine
3	14"	pine
3	18"	oak
1	20"	hickory
1	30"	Oak

following values:

D.B.H.	UNITS		#TREES		
12"	3.2	Х	7	=	22.4
14"	3.6	Х	13	=	10.8
18"	4.0	Х	13	=	12
20"	4.0	Х	1	=	4.0
30"	14.7	Х	1	=	14.7
he sum total of u	nits, 63.9, is	the EF), <u>existing de</u> ı	EDF total	63.9

Step 3

Calculate the required replacement density factor (RDF) by subtracting the EDF (Step 2) from the DFS (Step 1).

Example:

RDF	ш	DFS	-	EDF
RDF	П	66	-	63.9
RDF	II	2.10		

Step 4

The RDF can be converted back to caliper inches using Table 2.0. Any number or combination of transplantable size trees can be used so long as their total density factor units will equal or exceed the RDF.

Example: On the 2.2 acre site the following number and size of trees will be planted:

No.	Size	Species	Density Factor Units	DF x Number =	Total
5	2"	RED MAPLE	0.50	5 x 0.50 =	2.50
				Replacement density factor < or = to	2.50

2.50 is greater than the RDF of 2.10, thus the minimum requirements have been met.

Conversion Tables

TABLE 1.0 – EXISTING TREES TO REMAIN

Conversion from D.B.H. to density factor units for trees remaining on the site.

D.B.H.	Units	D.B.H.	Units	D.B.H.	Units
1-4	0.4	36	21.3	59	56.9
5-7	1.2	37	22.5	60	58.9
8-9	2.0	38	23.7	61	60.8
10	2.4	39	24.9	62	62.8
11	2.8	40	26.1	63	64.9
12	3.2	41	27.6	64	67.0
13-15	3.6	42	28.8	65	69.1
16-20	4.0	43	30.3	66	71.2
21	4.8	44	31.8	67	73.4
22	5.2	45	33.0	68	75.6
23	8.7	46	34.5	69	77.9
24	9.3	47	36.0	70	80.1
25	10.2	48	37.8	71	82.4
26	11.1	49	39.3	72	84.8
27	12.0	50	40.8	73	87.1
28	12.9	51	42.7	74	89.6
29	13.8	52	44.2	75	92.0
30	14.7	53	45.9	76	94.5
31	15.6	54	47.7	77	97.0
32	16.8	55	49.4	78	99.5
33	17.7	56	51.3	79	102.1
34	18.9	57	53.1	80	104.7
35	20.1	58	55.0		

TABLE 2.0 - REPLACEMENT TREES

Conversion from caliper to density factor units for replacement trees.

CALIPER	UNITS	CALIPER	UNITS
1	0.40	8	1.30
2	0.50	9	1.50
3	0.60	10	1.70
4	0.70	11	1.90
5	0.90	12	2.10
6	1.00	13	2.30
7	1.20	14	2.50

Container grown pine trees are given replacement credit as follows:

SIZE	UNITS
7 Gallon	0.4
3 Gallon*	0.2

*The use of 3 gallon pines is permitted only with prior approval

Tree relocation: Replacement units may be granted to trees relocated on site. Tree relocation is subject to the Senior Arborist's or designated agent(s) approval.

3. Standards for Selecting Quality Replacement Stock

- a. Trees selected for planting must meet the minimum requirements as provided in, Tables 3.0 through 8.0 provided at the end of this section.
- b. Trees selected for planting must be free from injury, pests, disease, or nutritional disorders.
- c. Trees selected for planting must be of good vigor. The determination of vigor is a subjective evaluation and dependent upon species variability. The following criteria are generally used for the determination of vigor:
 - 1. Foliage should have a green or dark green color. Vigorous trees will have large leaves and dense foliage when compared to trees with poor vigor.
 - 2. Shoot growth for most vigorous trees will be at least 1 foot per year. At least ½ of the branches should arise from points on the lower 2/3 of a trunk.
 - 3. Bark texture can denote vigor. Smooth or shiny bark on the trunk and branches of a young tree usually signifies good vigor, conversely, rough and dull bark could indicate poor vigor.
 - 4. Trunk taper: the trunks of vigorous trees will generally have an increase in diameter with a decrease in height. Trees with reverse tapers or no taper should be avoided.
 - 5. Root color: young roots of most trees will be light in color.
- d. Trees selected for planting must be free of root defects. Two types of root defects generally occur:
 - 1. Kinked roots, in which taproots, major branch roots, or both are bent more than 90 degrees with less than 20 percent of the root system originating above the kink. A tree with such roots will probably bend at the soil line when released from a supporting stake.
 - 2. Circling or girdling roots which circle 80 percent or more of the root system by 360 degrees or more. A tree with such roots would ultimately have less than 20 percent of its system available for support.

4. Planting Minimum Requirement Tables

Table 3.0 - CALIPER TO HEIGHT RATIOS FOR DECIDUOUS TREES

STANDARD SHADE TREES			GROWING TREES	SMALL UPRIGHT
OTHER STINE THEE		OLOV	OKOWINO IKEEO	OWINEE OF KIOTT
CALIPER IN INCHES	AVERAGE RANGE	MAXIMUM / MINIMUM		AVERAGE RANGE
	HEIGHT IN FEET	HI	EIGHT IN FEET	HEIGHT IN FEET
5/16	-	-		2 To 3
7/16	-	-		3 To 4
9/16	-	-		4 To 5
11/16	-	-		5 To 6
7/8	-	-		6 To 8
½ To ¾	5 To 6	8	3.5	-
3⁄4 To 1	6 To 8	10	4	-
1 To ¼	8 To 10	11	5.5	-
1 1/4 To 1 ½	8 To 10	12	6.5	-
1 ½ To 1 ¾	10 To 12	14	6.5	-
1 ¾ To 2	10 To 12	14	6.5	-
2 To 2 ½	12 To 14	16	8	-
2 ½ To 3	12 To 14	16	8	-
3 To 3 ½	14 To 16	18	9.5	-
3 ½ To 4	14 To 16	18	9.5	-
4 To 5	16 To 18	22	10.5	-
5 To 6	18 AND UP	26	12	-

Table 4.0 - HEIGHT TO SPREAD RATIO FOR CONIFEROUS NURSEY TREES

HEIGHT IN INCHES	SPREAD RANGE IN INCHES
12 To 15	8 To 12
15 To 18	9 To 15
18 To 24	12 To 18
24 To 30	15 To 21
30 To 36	18 To 24
36 To 48	21 To 30
48 To 60	30 To 36
60 To 72	36 To 48

Generally the Height: Spread ratio should be no less than 2:1.

Table 5.0 - CONTAINER SIZE TO RATIO HEIGHT

	DECIDUOUS TREES	CONIFEROUS TREES		
	HEIGHT SIZES			
CONTAINER	IN	IN		
SIZE	FEET	INCHES		
1 GALLON	1 To 1 ½	6 To 9		
5 ½" x 6"	1 ½ To 2	9 To 12		
	2 To 3	12 To 15		
	3 To 4	15 To 18		
		18 To 24		
2 GALLON	2 To 3	12 To 15		
7"x7 ½"	3 To 4	15 To 18		
	4 To 5	18 To 24		
		24 To 30		
5 GALLON	4 To 5	18 To 24		
9" x 10"	5 To 6	24 To 30		
	6 To 8	30 To 36		
	-	36 To 42		
	-	42 To 48		

Table 6.0 – MINIMUM ROOT SPREAD AND BALL DIAMETER FOR DECIDUOUS TREES

CALIPER	BARE ROOT DIAMETER SPREAD FOR ALL TREES	BALL DIAMETER FOR STANDARD AND SLOW GROWING BALL AND BURLAP TREES		BALL DIAMETERS FOR SMALL UPRIGHTTREES
INCHES	INCHES	INCHES	HEIGHT IN FEET	DIAMETER INCHES
½ To ¾	12	12	2To3	10
3/4 To 1	16	14	3 To 4	12
1 To 1 1/4	18	16	4 To 5	14
1 ½ To 1 ¾	20	18	5 To 6	16
1 1/4 To 1 1/2	22	20	6 To 7	18
1 ¾ To 2	24	22	7 To 8	20
2 To 2 ½	28	24	8 To 9	22
2 ½To 3	32	28	9 To 10	24
3 To 3 ½	38	32	10 To 12	26
3 ½ To 4	-	38	-	-
4 To 4 ½	-	42	-	-
4 ½ To 5	-	48	-	
5 To 5 ½	-	54	-	-

Table 7.0 – RECOMMENDED BALL DIMENSIONS FOR LARGE TREES

TREE DIAMETER	BALL DIAMETER	BALL DEPTH	APPROXIMATE WEIGHT OF BALL AND TREE
INCHES	FEET	INCHES	TONS
5	4	30	1.5
6	5	32	2.4
7	6	34	3.7
8	7	36	5.4
9	7'/2	36	6.2
10	8	38	7.4
11	9	40	9.9
12	10	40	12.2

Table 8.0 – RECOMMENDED MINIMUM BALL DIAMETERS FOR BALL AND BURLAP CONIFEROUS TREES

HEIGHT IN FEET	DIAMETER IN INCHES
1'/2 To 2	10
2 To 3	12
3 To 4	14
4 To 5	16
5 To 6	20
6 To 7	22
7 To 8	24
8 To 9	27
9 To 10	30
10 To 12	34
12 To 14	38
14 To 16	42
18 To 20	50

5. Transplanting Standards

- a. The transplanting of new trees can result in major injury to their root system. If proper transplanting techniques are employed, conditions will be more favorable for tree recovery, and the rate of attrition for newly planted trees will be reduced.
- b. Transplanting procedures shall follow standards established by the International Society of Arboriculture in the "Trees and Shrub Transplanting Manual". The following is a summary of several of the more important considerations provided in the manual.
 - Pre-Planting Considerations

- Only healthy trees with a well developed root system and a well formed top, characteristic of the species, should be planted. Standards for selecting quality stock are provided in Section C. Revegetation.
- Trees selected for planting must be compatible with the specific site conditions. A site specific tree list will be provided by the County Arborist upon request.
- The ability of a species to regenerate a new root system and to become reestablished should be considered. Deciduous and evergreen trees should be planted between the end of November and February. Trees planted outside of this time period will NOT be accepted by Fulton County unless a bond is submitted to guarantee their replanting if they die.

c. Planting procedures

- Planting holes should be no less than 1 foot wider than the root ball or bare roots of the tree being planted. A planting hole 3 times the width of the root ball is recommended.
- Trees should not be planted deeper than they were in their former location or container.
- Spade compacted bottom and sides of the planting hole should be roughed or scarified to allow the penetration of developing roots.
- Good water drainage from the bottom of the planting hole is essential for root regeneration.
- Once the transplanted tree is set, the hole should be backfilled with soil of good texture and structure. Traditionally, backfill material is comprised of a mix of native soil, organic matter such as peat, and inorganic material such as pearlite or vermiculite in a 1:1:1 ratio. A back fill with native soil alone is adequate if the soil is of good quality.
- The addition of fertilizer to backfill soil can cause root injury, and is therefore not recommended. If fertilizer must be added, a low rate should be used. Approximately 1.5 pounds of nitrogen per cubic yard of back fill is recommended for bare root plants, and 2.5 pounds of nitrogen per cubic yard of back fill for balled and burlaped trees.
- The back fill should be gently tamped (but not compacted), and soaked for settling.

The soil should be slightly mounded to allow for settling; a ridge or dike around the perimeter of the hole can facilitate watering.

d. Post-planting procedures

- Pruning. The amount of pruning necessary for newly planted trees depends upon the trees' response to planting. A decrease in leaf surface area from pruning can result in a reduction of the production of food, thus ultimately inhibiting root development. Pruning for vigor or to train young trees should therefore be delayed until after the first growing season.
- Pruning is recommended during the first growing season if the tree is showing "transplant shock" or drought symptoms (wilting), or for the removal of weak, broken, or diseased branches. For correct pruning of trees, always follow the ANSI A300 standard practice for pruning.
- The use of commercially available anti-transpirants is recommended for deciduous trees transplanted while in foliage, if the trees begin to wilt. Anti-transpirants are chemical foliage sprays that reduce water loss through the leaf surface.
- Staking should be used on newly planted trees only where determined necessary. The extent of staking will depend upon tree strength, form and condition at planting, expected wind conditions, the amount of vehicle or foot traffic, and the level of follow-up maintenance. Staking can cause tree damage. Periodic follow-up inspections are required to prevent serious tree-staking problems. Staking should be removed as soon as the tree is capable of providing its own anchorage and support. Recommended types and uses of staking are as follows:
 - 1. Protective staking is used to provide a barrier from foot traffic, mowers, vehicles, etc., for trees able to stand without support.
 - 2. Anchor staking is used to hold a root ball in place during the period of reestablishment for trees with otherwise adequate support.
 - 3. Support staking is used for trees with weak trunks or oversized crowns and unable to stand without support or in wind.
 - 4. Guying is recommended where necessary for large transplanted trees (4" D.B.H. or greater) to provide both anchorage and support.
 - 5. Mulching newly planted trees will reduce competition from weeds and moderate soil moisture and temperature extremes.

- 6. Fertilizer application should begin after the tree's first full growing season.
- Water availability for the newly planted tree should be monitored and adjusted according to the species water requirements and the site conditions.

D. LANDSCAPE STRIP AND BUFFER STANDARDS

1. Landscape Strips

- a. The width of landscape strips must, as a minimum, conform with the requirements of the conditions of zoning or the requirements of the Zoning Resolution, which ever is greater. The width is measured from the newly dedicated right-of-way, or from the property lines of contiguous parcels, as applicable.
- b. No permanent structures are permitted within landscape strips. This includes, retaining walls, curbing, dumpsters, detention facilities, etc. Monument signs, drainage structures, and sidewalks may be allowed with pre-approval.
- c. Curb stops must be used to prevent vehicle overhang into required landscape strips and parking lot landscape islands. One curb stop per parking stall is required.
- d. Signs within required landscape strips are subject to the approval of the Department of Environment & Community Development or designated agent(s). These signs may only be located in areas of turf or groundcover and must not conflict with the growth potential of trees and shrubs. Signs are not permitted within required undisturbed buffers.
- e. The deposition of storm water runoff into drainage swales through landscape strips is generally not permitted. Exceptions will be considered only if this standard will create an undue hardship to the property owner. Under no circumstances may the width of a drainage easement through a landscape strip exceed the width of the strip.
- f. Parking lot landscape islands must, at a minimum, conform to the requirements of the Zoning Resolution. These islands must be planted with at least one 2 inch caliper (minimum) shade tree. Stormwater runoff into parking lot landscape islands may be permitted upon approval by the County Arborist.
- g. When fencing is required as a condition of rezoning, the finished surface of the fence must face externally to the project. The exact location for fence placement within the landscape strip will be determined on a case by case basis by the County Arborist or designated agent(s).
- h. All species within required landscape strips must be ecologically compatible with the intended growing site. If ornamental trees are used to satisfy landscape strip requirements, they will not count for satisfying tree density requirements. All plant materials are subject to the Department or designated agent(s) approval.

- i. Trees within required landscape strips shall be provided as follows:
 - 1. Landscape strips 25 feet wide or less; a minimum of one tree for every 30 linear feet of landscape strip.
 - 2. Landscape strips 25 feet wide or more; a minimum of one tree for every 20 linear feet of landscape strip.
 - 3. Clumping is permitted.
- j. All required landscape strips must be designed with at least 60% coverage in trees and shrubs, with no more than 40% coverage in grass or ground cover. Landscape strip coverage will be calculated as follows:
 - 1. Calculate the total spatial area of the landscape strip.
 - 2. Count the number of trees within the landscape strip and multiply by 100 square feet for trees less than 6" caliper and 200 square feet for trees 6" and greater (This will allow some credit for the spatial coverage of the tree canopy).
 - 3. Calculate the coverage provided by the shrubs planted on center:

ON CENTER	Equals	COVERAGE PER SHRUB
*3 feet	=	9 square feet
*4 feet	=	16 square feet
*5 feet	=	25 square feet

^{*}At maturity, shrubs must attain this width. Shrub species and spacing is subject to Arborist's approval.

4. Grass or ground cover may not exceed 40 % coverage within the strip.

2. Planting Within Rights-of-Way

Approval from the Department, Department of Facilities and Transporation Services and the Department of Transportation (D.O.T), where applicable, is required, as planting is generally not permitted in the rights-of-way. Where approval is received, the following conditions must be met:

- a. Indemnification and maintenance agreements must be recorded with the Fulton County Superior Court Clerk, Room 106, 404-612-5371, prior to permitting irrigation or planting within County rights-of-way.
- These agreements must be recorded in the name of a homeowner's association (along with documentation attesting to that association's existence), for subdivisions.
- These agreements must be recorded in the property owner's name for all other types of projects.
- b. Trees planted within rights-of-way cannot be counted toward the tree density requirement for a site.

- Prior to planting trees in rights-of-way, a shoulder cross-section must be provided indicating the placement of the trees in relation to the curb, and underground utilities. Placement and species are subject to the approval of the County Arborist and the Director of Facilities and Transportation Services.
- c. Drawings for irrigation system within rights-of-way must indicate the location of lines, heads, spray radius, shut off valves, timers and a 24 hour emergency contact phone number.

3. Buffers


- Required undisturbed buffers must remain undisturbed and actively protected in perpetuity under the auspices of the Tree Protection Ordinance and Administrative Guidelines.
- b. Buffers must be replanted where sparsely vegetated or where disturbed for approved access and utility crossings. The buffers should be replanted to meet the following standards:
- Must provide a visual barrier. To accomplish this screening, the plant materials must be a minimum 5 feet in height at time of planting, moderately growing evergreen and have branching all the way to the ground. Slower growing trees may be used if larger materials are planted. All buffer plant materials are subject to the County Arborist or designated agent(s) approval. Please see Appendix J for the list of acceptable evergreen plant material for undisturbed buffers.
- The number of planting rows for tree replacement in buffers is determined by the buffer width:

Buffer Width	Minimum Planting rows
<20'	2
20' to 30'	3
31' to 50'	4
> 50'	4 plus 1 row for each additional 15 feet

- Drainage within or through buffers is subject to the approval of the Department or designated agent(s).
- Encroachment into buffers for the construction of retaining walls, footings, or wall supports, is not permitted unless otherwise specified in the conditions of rezoning. Encroachments into buffers shall require zoning modifications or variances as applicable.
- All buffers require a 10 foot improvement setback interior and adjacent to the buffer. No grading is allowed in this improvement setback unless permission is obtained from the Director of the Department. (Contact Arborist office for details.)


Fulton County Stream Protection Ordinance

The Fulton County Stream Protection Ordinance requires streams in all watersheds within unincorporated South Fulton County to provide a minimum 75-foot undisturbed buffer on each side of the stream as measured from the top of bank. An additional 25-foot setback shall be maintained adjacent to the undisturbed buffer in which all impervious surfaces shall be prohibited. Storm water retention or detention facilities are prohibited within the stream channel.

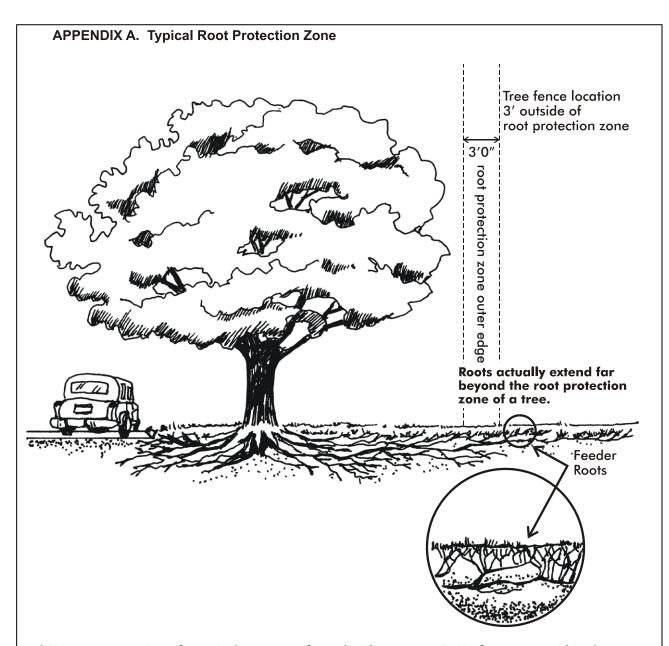

This is a cross section of a typical root zone for a deciduous tree. 85% of roots are within the top 18" of the soil. Roots spread amazingly far from the trunk. They typically spread up to 2 times the height of the tree and sometimes farther! However, the essential mass of roots is usually found within the **ROOT PROTECTION ZONE**.


The root protection zone is a zone defined as (1) a circle with a radius that extends one foot out for every inch of trunk diameter, or (2) a circle with a radius extending from a tree's trunk to a point no less than the end of a tree's longest branch, **whichever is greater**.

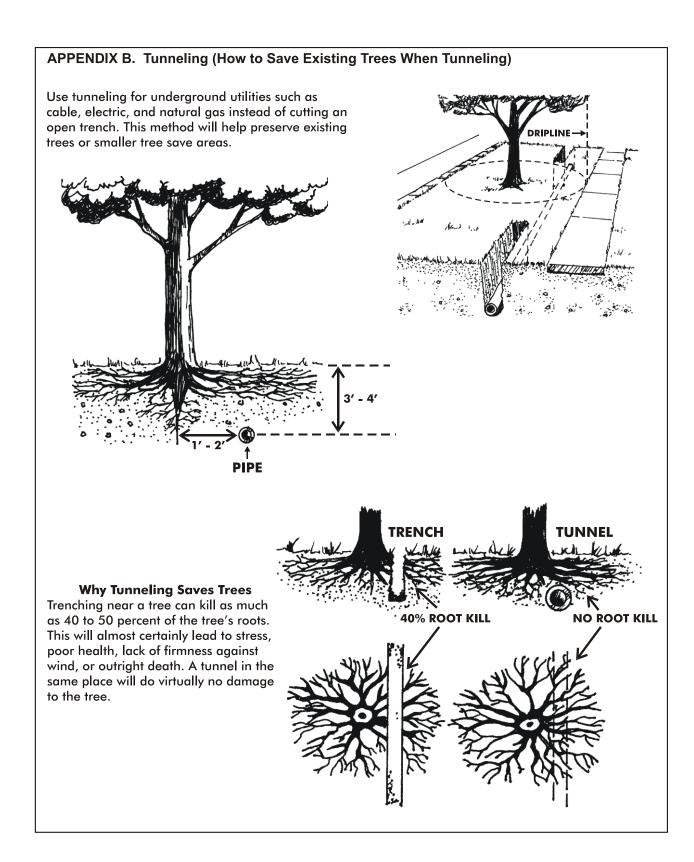


Appendix B. Tunneling -70-

APPENDIX C. Grade Changes

How to preserve existing trees with the use of retaining walls when grade changes are necessary

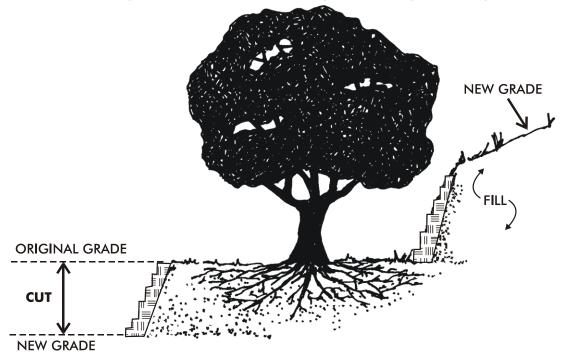

Grade Change Examples - Methods of preventing root suffocation from fill dirt when changing grade

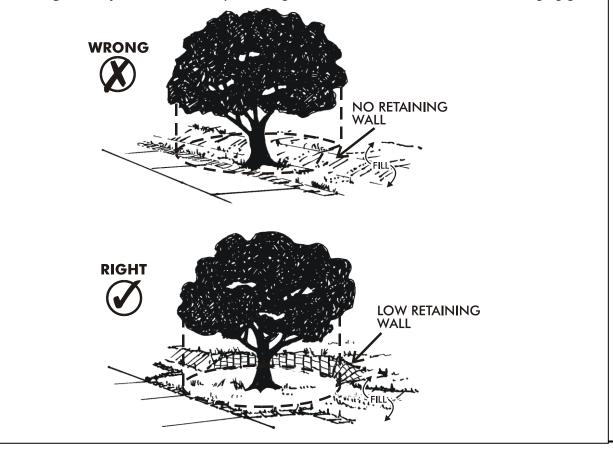

Appendix C Grade Changes -71-

APPENDIX D. Check List For Landscape Drawings & Tree Protection Plans

Landscape Drawings (generally used for commercial zoned projects) shall have a separate sheet submitted with the landscape plan, to include:

- All required undisturbed buffers, landscape strips, parking islands, and state water (streams, lakes, river, etc ...) and tributary buffers with the required dimensions.
- Planting schedules with proposed plant material names (common and botanical), quantity, size, and any special planting notes.
- Planting and staking details.
- Location of proposed irrigation systems, if applicable.
- Drawings for irrigation systems within the rights-of-ways must show the locations of lines, heads, spray radius, timers, and an emergency 24 hour contact number.
- All required landscape strips must be planted at a density so as to provide at least 60% spatial coverage of trees and shrubs.
- Parking islands must be planted with shade trees. (Minimum 2 inch caliper) Permanent structures cannot be permitted in landscape strips, landscape islands, or buffers; including, but not limited to, headwalls, drop inlets, catch basins, rip-rap, light fixtures, phone booths, etc.
- Curb stops must be used to prevent vehicle overhang into required landscape strips and parking islands. One curb stop per parking stall is required.
- The following notes shall be indicated on all landscape plans in large letters:
 - 1) ALL LANDSCAPING SHALL BE IN PLACE PRIOR TO THE CONNECTION OF PERMANENT POWER OR RECORDING OF A FINAL PLAT.
 - 2) CONTACT THE DEPARTMENT OF PLANNING AND COMMUNITY SERVICES AT 404-612-7531 FOR A SITE INSPECTION UPON COMPLETION OF LANDSCAPE INSTALLATION.
 - 3) IF THE LANDSCAPE DESIGN OR PLANT MATERIAL ARE CHANGED IN ANY WAY FROM THE FULTON COUNTY PERMITTED PLAN, YOU SHALL SUBMIT TWO SETS OF REVISED PLANS TO THE FULTON COUNTY ARBORIST'S OFFICE FOR APPROVAL PRIOR TO ANY LANDSCAPE INSTALLATION.

Tree Protection Plans (generally used for residential zoned projects)

- 1. Provisions for tree protection on the site shall be, at a minimum, in conformance with the requirements of the Fulton County Tree Preservation Ordinance and the County Department of Planning and Community Services Administrative Guidelines pertaining to tree protection.
- 2. A tree protection plan shall be submitted either as part of the landscape plan or as a separate drawing to include the following:
 - All tree protection zones and areas of revegetation.
 - Ground-run survey location of all specimen trees and State Waters, including spring heads.
 - Indicate those specimen trees to be removed. Removal of specimen trees or disturbance of root protection zone is subject to the approval of the Department or designated agent(s).
 - Limits of clearing and land disturbance such as grading, trenching, etc. where these disturbances may affect tree protection zones.
 - Proposed location of underground utilities.
 - Methods of tree protection shall be indicated for all tree protection zones, including tree fencing, erosion control, retaining walls, tunneling for utilities, transplanting, staking, signage, etc.
 - This plan should indicate staging areas for parking, material storage, concrete washout, and debris burn and burial holes where these areas might affect tree protection.
 - The required site tree density factor must be satisfied. Compliance shall be demonstrated on the Tree Protection Plan. Existing trees or stands of trees used in the density calculation must be indicated on the drawing.
 - Flowering ornamental replacement trees may not be used in density calculation.
 - Replacement trees used in density calculations must be ecologically compatible with the intended growing site.
 - An irrigation plan may be required and it must include a watering schedule for existing and replacement trees on the site.
 - The following notes shall be indicated on both tree protection plans and grading plans in large letters:

- 1) CONTACT THE DEPARTMENT OF PLANNING AND COMMUNITY SERVICES AT 404-612-7531 TO ARRANGE A PRE-CONSTRUCTION CONFERENCE WITH THE COUNTY ARBORIST OR DESIGNATED AGENT(S) PRIOR TO ANY LAND DISTURBANCE.
- 2) ALL AND EROSION CONTROL MEASURES MUST BE INSTALLED PRIOR TO GRADING. ALL REQUIRED TREE PROTECTION FENCING (ALONG WITH TREE SAVE SIGNAGE) MUST BE INSTALLED PER THE APPROVED TREE PROTECTION PLAN PRIOR TO THE PRE-CONSTRUCTION MEETING.
- 3) UNDISTURBED BUFFERS SHALL BE REPLANTED TO BUFFER STANDARDS WHERE SPARSELY VEGETATED OR WHERE DISTURBED AT APPROVED UTILITY CROSSINGS. REPLANTINGS ARE SUBJECT TO COUNTY ARBORIST OR DESIGNATED AGENT(S) APPROVAL.

Addendum to Appendix E., trees that have higher unit values

• Trees worth 1.0 unit each for density and/or recompense (4"caliper size)

(2" caliper sizes of these trees will count as .8 units for density and .5 for recompense)

• Trees worth .9 units each for density and/or recompense (4" caliper size)

Cladrastis Lutea-----American Yellowwood

Crytomeria Japonica-----Cryptomeria

Ginkgo Biloba-----Ginkgo

Juniperus Virginiana-----Eastern Red Cedar

Metasequoia Glytostroboides------Dawn Redwood

Quercus Acutissima-----Sawtooth Oak

Quercus Lyrata-----Overcup Oak

(2" caliper sizes of these trees will count as .7 units for density and .45 for recompense)

APPENDIX E. Tree Species Selection List

Trees generally acceptabe for credit in Density Calculations

	BOTANICAL NAME	COMMON NAME		BOTANICAL NAME	COMMON NAME
1	Acer Barbatum	Southern Sugar Maple	23	Juniperus Virginiana	Eastern Red Cedar
2	Acer Rubrum	Red Maple	24	Liquidambar Styraciflua	Sweet Gum
3	Acer Saccharum	Sugar Maple	25	liriodendron Tulipifera	Poplar
4	Betula Nigra	River Birch	26	Magnolia Grandiflora	Southern Magnolia
5	Carpinus Caroliniana	American Hornbeam	27	Metasequoia Glytostroboides	Dawn Redwood
6	Carya Species	Hickories	28	Nyssa Sylvatica	Black Gum
7	Carya Illinoinesis	Pecan	29	Ostrya Virginiana	American Hophombean
8	Castanea Mollissma	Chinese Chesnut	30	Paulownia Tomentosa	Royal Paulownia
9	Catalpa Speciosa	Hardy Catalpa	31	Pinus Echinata	Shortleaf Pine
10	Cedrus Atlantica	Atlas Cedar	32	Pinus Taeda	Loblolly Pine
11	Cedrus Deodara	Deodar Cedar	33	Pistacia Chinensis	Chinese Pistache
12	Cedrus Libani	Cedar of Lebanon	34	Platanus Occidentalis	Sycamore
13	Celtis Laevigata	Sugar Hackberry	35	Quercus Species	Oaks, except Live Oaks
14	Cercidiphyllum Japonicum	Katsura Tree	36	Salix Babylonica	Weeping Willow
15	Cladrastis Lutea	American Yellowwood	37	Sophora Japonica	Japanese Pagodatree
16	Crytomeria Japonica	Cryptomeria	38	Taxodium Distichum	Common Baldcypress
17	Fagus Grandifolia	American Beech	39	Tilia Americana	Linden / Basswood
18	Fraxinus Americana	White Ash	40	Tsuga Canadensis	Canadian Hemlock
19	Fraxinus Pennsylvanica	Green Ash	41	Ulmus Americana	American Elm
20	Ginkgo Biloba	Ginkgo	42	Ulmus Parvifolia	Chinese Elm
21	Gymnocladus Dioicus	Kentucky Coffee Tree	43	Zelkova Serrata	Zelkova
22	Juglans Nigra	Black Walnut			

Other trees may be approved on a case by case basis. The general criteria for replacement trees to be used in Tree Density Calculations are large growing (35' – 40' tall or taller at maturity) and long-lived. All planting plans are subject to the County Arborist or the Department of Environment & Community Development designated agent(s) approval.

APPENDIX F. Sample Tree Density Calculation

Example:

The required DFS (density factor for the site), is calculated as follows, 5 acres x 30 units = 150 units required.

EDF (Existing Density Factor

	, ,	,		
	Size	Units	Number	Total Units
	24"	9.3	2	18.6
	18"	4.0	15	60
	10"	2.4	8	19.2
<u> </u>			Total EDF	97.8

RDF (Replacement Density Factor)

Size	Units	Number	Total Units
3"	.60	15	9
6"	1.00	45	45
		Total RDF	54

EDF+RDF=	Site TotalTree Density	>	or	=	DFS	
97.8+54=	151.8	>			150	Density Satisfied

THE SUM OF THE EDF AND RDF MUST BE GREATER THAN OR EQUAL TO THE DFS.

APPENDIX G: MULTI-TRUNKED TREE CALCULATIONS TO DETERMINE SPECIMEN TREE STATUS

<u>DIAMETER</u>	RADIUS	AREA IN SQUARE	<u>NOTES</u>
1	5	<u>INCHES</u> .79	
1	.5 1	3.14	
2 3	1.5	7	
4	2	13	
5	2.5	20	
6	3	28	
7	3.5	38	
8	4	50	
9	4.5	64	
10	5	79	79 square inches is the area for
11	5.5	95	which a native flowering tree is
12	6	113	considered a specimen.
13	6.5	133	
14	7	154	
15	7.5	177	
16	8	201	
17	8.5	227	
18	9	254	
19	9.5	283	
20	10	314	
21	10.5	346	
22 23	11	380	
23 24	11.5 12	415 452	452 aguara inabas is the area for
25	12.5	491	452 square inches is the area for which pines and beech trees are
26	13	531	considered specimen size.
27	13.5	572	572 square inches is the area for
28	14	615	which most hardwood trees are
29	14.5	660	considered specimen size.
30	15	707	
31	15.5	754	
32	16	804	
33	16.5	855	
34	17	907	
35	17.5	962	
36	18	1017	
37	18.5	1075	
38	19	1134	
39	19.5	1194	
40	20	1256	
41	20.5	1320	
42	21	1385	
43	21.5	1451	

- PROCEDURE:1. Measure trunks at 4.5 feet above grade to determine the diameter (DBH) in inches of each trunk.
- 2. Use charts to determine area in square inches.
- 3. Add square inches of each trunk and come up with a total.
- 4. Determine if total area is equal to or greater than the minimum specimen size for the type of tree identified.

APPENDIX H. Tree and Site Related Disturbances

Tree protection zones, specimen trees or stands of trees designated to be saved must be protected from the following damages which may occur during all phases of land disturbance and construction processes. Methods of tree protection and disturbance prevention are provided in Section II, Part B.

- Direct physical root damage.
- Indirect root damage.
- Trunk and crown disturbances.
- A. Direct physical root damage most frequently occurs during site clearing and grading operations, where transport or feeder roots are cut, torn or removed.
 - 1. Transport and feeder roots tend to tangle and fuse among the roots of adjacent trees. The removal of trees with heavy machinery along the outer periphery of a tree save area can result in considerable damage within the tree save area.
 - 2. The most substantial form of root damage for all root types occurs in the form of cut roots. Roots are cut in grade reduction or from trenching for underground utilities, sanitary sewer, or storm sewer lines.
 - 3. A more subtle form of root damage is the loss of feeder roots. Feeder roots normally occur within the organic layer and the surface four inches of top soil, subsequently, these roots can be easily damaged by the track action from a single bulldozer pass. The stripping of top soil within a tree's root protection zone can totally eliminate it's feeder root system.
- B. Indirect root damage through site modification can result from positive grade changes, temporary storage of fill material, sedimentation of erosion materials, soil compaction, and soil chemical changes.
 - Positive grade changes from fill and sedimentation causes a decrease in soil oxygen levels. An increase in soil carbon dioxide and other toxic gases can also occur, leading to large areas of anaerobic soil conditions and causing a decrease in the root respiration process which is essential for the uptake and transport of minerals and nutrients.
 - Anaerobic soil conditions are also produced by soil compaction, the increase in soil bulk density with a decrease in soil pore space. Compacted soil is also impervious to root penetration, and thus inhibits root development. Soil compaction is generally caused by the weight and vibrations of heavy machinery, vehicle parking, and the storage of fill and/or construction material within the root protection zone of trees.
 - Changes in soil chemistry will adversely affect tree survival. The most frequent occurrence is the change (decrease) in soil acidity by concrete washout. Most trees native to the Fulton County area prefer slightly acid soils; concrete residues are highly

basic. The leakage or spillage of toxic material such as fuels or paints can be fatal for trees.

- C. Trunk and crown disturbance are generally mechanical in nature and are either caused directly by clearing and grading machinery, or indirectly by debris being cleared and falling into trees marked for protection.
 - Common forms of damage include stripped bark and cambium, split trunks, and broken limbs.
 - Damage also occurs from the posting of signs such as building permits or survey markers on trees.
 - Indirect damage can be caused by the placement of burn holes or debris fires too close to trees. The possible range of damage include scorched trunks with some cambial dieback, the loss of foliage due to evaporative heat stress (leaf desiccation), and completely burned trunk and crowns.

APPENDIX I. Residential Erosion & Sedimentation Control and Tree Protection Agreement Building Permit No. _____ THIS PERMIT AUTHORIZES TO BEGIN RESIDENTIAL GRADING/LAND DISTURBANCE ON LOT IN _____ SUBDIVISION OR AT THE FOLLOWING ADDRESS THE AUTHORIZED PERSON ACKNOWLEDGES THAT HE/SHE IS RESPONSIBLE FOR TAKING ADEQUATE STEPS TO: TREE PROTECTION **EROSION CONTROL** 1. Control soil erosion on said property. Protect areas of existing trees/tree save areas on this lot, so that a minimum of 20 tree units per acre is left after construction is 2. Control the movement of sediment off the site by means completed. If a specimen or heritage tree* exists on the lot and is in of properly constructed and maintained silt straps, (silt the way of proposed construction please contact the Fulton County fence, haybales, ets.) in those areas where water exits Arborist at 404-612-7531 to schedule an on-site meeting to try and the property. find alternate areas for the disturbance. 3. Keep mud off the streets fronting this property by Tree fence with tree save signage is required on a lot when clearing construction and maintenance of a driveway pad and and grading for home construction commences. All tree fences shall removal of mud from the street when necessary. remain and be maintained until the home construction is 100% completed. 4. Otherwise comply with all applicable erosion and sedimentation requirements, including those of the Fulton Otherwise comply with all applicable Tree Preservation County Soil Erosion and Sedimentation Control requirements, including those of the Tree Preservation Ordinance and Administrative Guidelines. Ordinance. These provisions and others are outlined in the Fulton County *Specimen or Heritage Trees – Any tree in fair or better condition Soil Erosion, Sedmentation & Pollution Control Ordinance of which equals or exceeds the following diameter sizes: 2010. (Please initial the appropriate statement below.) I, THE UNDERSIGNED AUTHORIZED PERSON, have Large hardwoods like Oaks, Maples, Yellow Poplars, and Hickories. obtained a copy of this Ordinance at this time and understand 27 inch diameter at $4\frac{1}{2}$ feet above the ground. the provision of the Law. B. Large hardwoods, Beeches, 24 inch diameter at 4½ feet above the I, THE UNDERSIGNED AUTHORIZED PERSON, ground. decline a copy of the Ordinance at this time. However, I do hereby attest that I do understand the provisions of the Law. C. Large softwoods like Pines and Cedars. 24 inch diameter at 41/2 feet above the ground. Small flowering trees like Dogwoods, Redbuds, and Sourwoods, 10 inch diameter at $4\frac{1}{2}$ feet above the ground. FAILURE TO COMPLY WITH THESE REQUIREMENTS WILL RESULT IN THE ISSUNACE OF A STOP WORK ORDER OR OTHER CITATIONS.

DISPLAY THIS PERMIT AT THE MAIN POINT OF ACCESS AND VISIBLE FROM THE STREET.

APPENDIX J. Acceptable Evergreen Plant Material for Undisturbed Buffers

Cherry Laurel		
Ligustrum		
Hedge Bamboo		
Eastern Red Cedar		
Cleyera		
Canadian Hemlock		
Cryptomeria		
Deodar Cedar		
American Holly		
Chinese Holly		
English Holly		
Longstalk Holly		
Lusterleaf Holly		
Perny Holly		
Nellie R. Stevens Holly, (cross between Chinese & English Hollies)		
Tree-form Yaupon Holly		
Hetzi Juniper		
Pfitzer Juniper		
Southern Magnolia		
Wax Myrtle		
Virginia Pine		
Japanese Viburnum		
Japanese Camellia		


Note: All buffer material must be a minimum of 5 feet tall once it is installed and have branching all the way to the ground.

APPENDIX K. Recommended Shade Trees for Parking Lots

Acer rubrum	Red Maple
Acer saccharum "Legacy"	"Legacy" Sugar Maple
Betula nigra	River Birch
Celtis laevigata	Sugar Hackberry
Cercidiphyllum japonicum	Katsuratree
Fraxinus pennsylvanica	Green Ash
Gingko biloba	Gingko
Ostrya viginiana	Hophombean
Pinus taeda	Loblolly Pine
Pistacia chinensis	Chinese Pistache
Platanus occidentalis	Sycamore
Quercus acutissima	Sawtooth Oak
Quercus coccinea	Scarlet Oak
Quercus laurifolia	Laurel Oak
Quercus lyrata	Overcup Oak
Quercus palustris	Pin Oak
Quercus phellos	Willow Oak
Quercus prinus	Chesnut Oak
Quercus rubra	Northern Red Oak
Quercus shumardii	Shumard Oak
Quercus stellata	Post Oak
Quercus velutina	Black Oak
Taxodium distichum	Bald Cypress
Ulmus parvifolia	Chinese Elm
Zelkova serrata	Japanese Zelkova


This is a recommended list only. Other species may be acceptable as long as they produce dense, full canopies at maturity and can develop sufficient root systems in confined spaces. Under no circumstances will upright, columnar or fastigiate trees be acceptable as parking lot shade trees.

APPENDIX L. Protective Tree Fencing

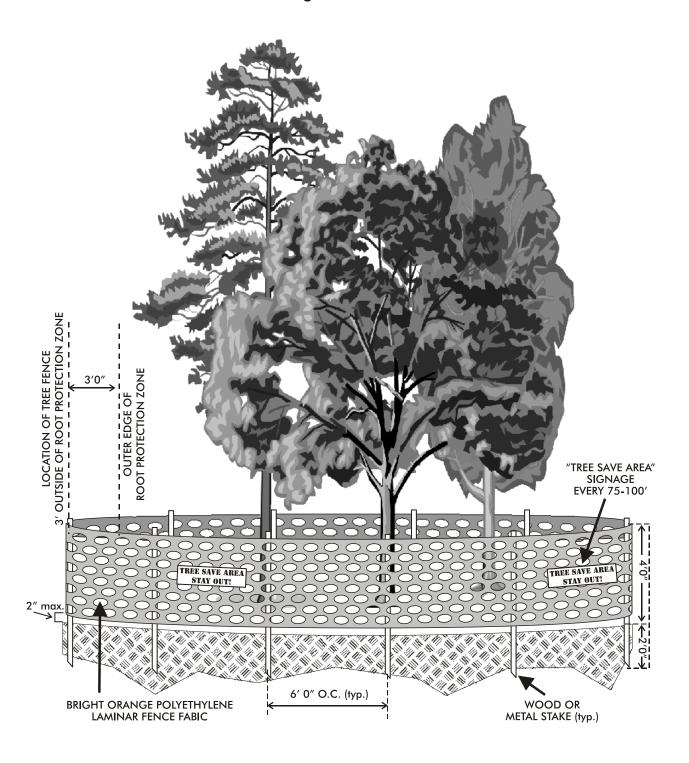

"Tree Save" signs may be purchased at the cashiers booth in Suite 2085 of the Environment & Community Development Department in the Fulton County Government Center.

APPENDIX M. Sample Tree Protection Plan

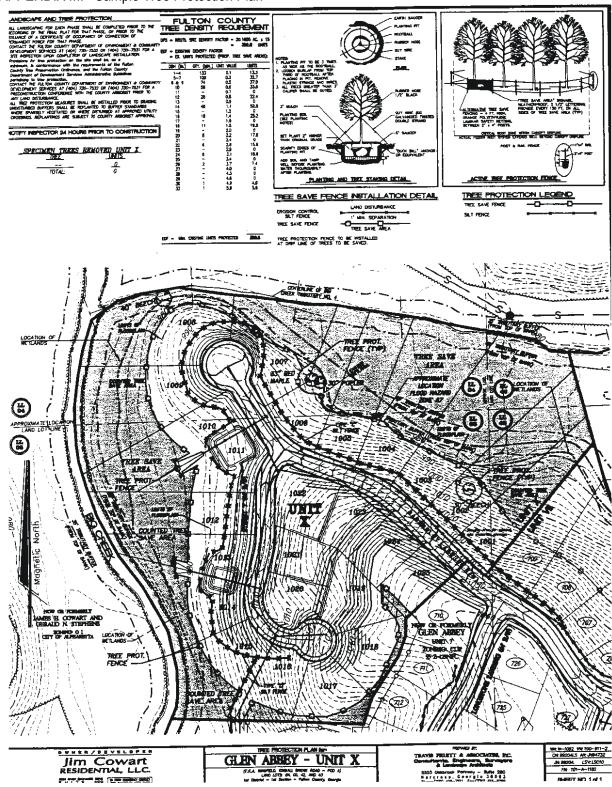

REFERENCES

AAN, 1973. American Standard for Nursery Stock. ANSI Z60. 1-1973, American Association of Nurerymen, Washington, D.C. 26 pp.

Grey, G.W. 1978. Urban Forestry. John Wiley and Sons, New York. 279 pp.

Harris, R.W. 1983. Agriculture, Care of Trees, Shrubs, and Vines in the Landscape. Prentice Hall Inc., Englewood Cliffs, N.J. 688 pp.

Himelick, E.B. 1981. Trees and Shrub Transplanting Manual. International Society of Aboriculture, Urban, II. 77 pp.

Lanphear, W.P. Editor, 1981. Pruning Standards for Shade Trees. National Arborist Association, Portsmouth, N.H. 3 pp.

Perry, T.O. 1982. The Ecology of Tree Roots and the Practical Significance There of. Journal of Arboriculture. 8:197-211.

Pirone, P.P. 1978. Tree Maintenance, Oxford University Press, New York. 587 pp.

Wargo, P.W. 1983. Effects and Consequences of Stress on Root Physiology. Journal of Arboriculture 9:173-176.

Wegner, K.F. 1984 Forestry Handbook. John Wiley and Sons, New York. 1335 pp.

Fazio, J.R. 1995. Trenching and Tunneling Near Trees. The National Arbour Day Foundation, Nebraska City 16-20 pp.

Jim Cowart Residential, L.L.C., 1999. Sample Tree Protection Plan for Glen Abbey – Unit X.